

PMI 3000 HUK



Pramac PMi series inverter: optimal solution to combine silent operation with less fuel consumption and tension stability; the inverters Pramac stabilize the output tension and supply power for all kinds of equipment. They guarantee maximum efficiency: adjusting the speed according to the required load, our inverters reduce the average fuel consumption.

FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- Lightweight and compact.
- Kit wheels integrated for easy transportation
- Fuel gauge allows user to track gasoline levels




PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	3000
Rated Power	Watts	2800



Engine		
Brand	Pramac	
Type	OHV	
Exhaust emission level	Stage V	
Operating Speed Nominal	rpm	Variable
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	0.52
Low Oil Shutdown	√	

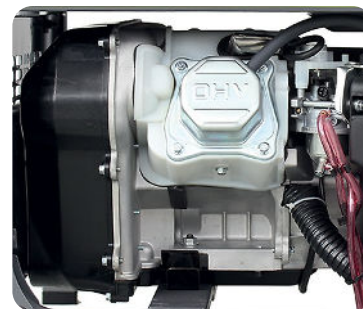

Alternator	
Voltage regulation system	Inverter

Dimensional data		
Length	(L) mm	555
Width	(W) mm	400
Height	(H) mm	450
Dry weight	kg	38
Carton box dimension LxWxH	mm	585x415x465



Autonomy		
Fuel tank capacity		10
Fuel consumption 50%	l/h	1.6
Running time 50%	h	6



Noise level		
Guaranteed noise level (LWA)	dB(A)	96

GENSET CONTROL

COMMANDS

- Selector switch: O/I
- Air choke Valve
- Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

INSTRUMENTATION:

- Voltmeter, Frequency meter and Hourmeter (display)
- Outputting energy (indicator light - Green)
- Overloading and Oil alarming (indicators light - Red)

PROTECTIONS

- Overload
- Oil Guard

OUTPUT:

- DC12V 6A



SOCKET TYPE

230V BS1363 (13A) IP44	2
------------------------	---