
## SC92 Beam clamps with shackle

### Working load limit (WLL) 1000 - 20000 kg

The SC92 beam clamp provides a quick and versatile rigging point for hoisting equipment, pulley blocks or loads. The unit offers flexible applications due to the wide adjustment range. The shackle suspension allows easy attachment of lifting devices. The clamp offers a safe and secure grip to the beam flange.

Product group: C4

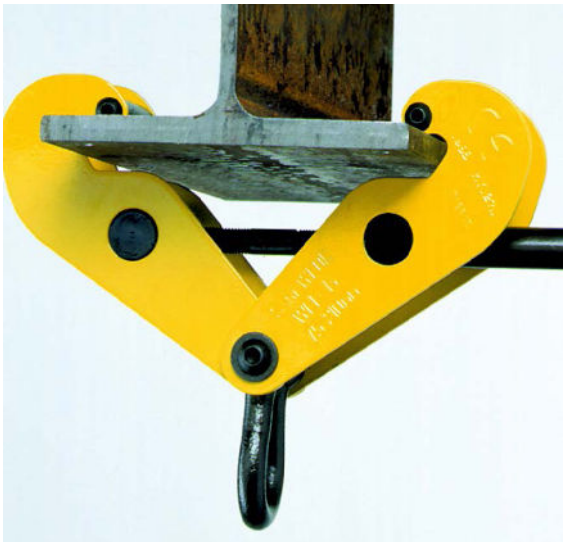

## INFO

This model must not be used for lifting. It is a suspension point.

### Technical data SC92

| Model | Art.-No. | WLL kg | Beam flange width mm | Weight kg |
|---|---|---|---|---|
| SC92-1 | N05400002 | 1000 | 75 - 210 | 5.0 |
| SC92-2 | N05400003 | 2000 | 75 - 210 | 6.0 |
| SC92-3 | N05400004 | 3000 | 100 - 270 | 8.0 |
| SC92-3/L | N4300000237 | 3000 | 75 - 305 | 9.0 |
| SC92-5 | N05400005 | 5000 | 100 - 270 | 10.0 |
| SC92-5/L | N4300000241 | 5000 | 75 - 305 | 12.0 |
| SC92-10 | N05400001 | 10000 | 75 - 305 | 19.0 |
| SC92-15 | N4300000232 | 15000 | 75 - 305 | 35.0 |
| SC92-20 | 192027171 | 20000 | 300 - 410 | 87.0 |



## BA Bulb bar anchors

### Working load limit (WLL) 750 - 6000 kg

The BA bulb bar anchor has been designed for attachment to bulb profiles, often found in ship compartments and engine rooms. It provides a semi-permanent suspension point. The clamp can be quickly and easily attached via the screw mechanism.

The fabricated light weight design ensures a firm grip onto the bulb section. The unique large bow hook ring gives easy connection for all types of lifting equipment.

Product group: I2

### Technical data BA

| Model | Art.-No. | *WLL kg | Max. bulb hp | *Weight kg |
|---|---|---|---|---|
| BA0.75 | N4300000023 | 750 | 80 - 160 | 3 |
| BA1.5 | N4300000020 | 1500 | 160 - 240 | 4 |
| BA3.0 | N4300000021 | 3000 | 240 - 320 | 5.5 |
| BA6.0 | N4300000022 | 6000 | 320 - 430 | 12.5 |

*Per clamp