

# GX 12/35 EVO AGM

## FULLY FEATURED COMPACT STACKER



This compact, powerful and robust stacker is the ideal solution for working in confined spaces.

The reduced width (800 mm), the lateral driving system and the wide mast positioning allow great manoeuvrability, stability and visibility.

Built-in battery charger with integrated cable and plug make it a plug and play unit!


### GX EVO AGM

The EVO version is equipped with powerful AGM deep cycle batteries that allow long endurance and large number of charging cycles. The ergonomic technopolymer tiller offers a comfortable grip. A specific electronic control enables lifting the forks with a proportional usage.

**EVO AGM**  
**GX 12**

### MANOEUVRABILITY

The overall width is the same as the Europallet (800 mm) to allow working in narrow spaces and corridors, increasing manoeuvrability and reducing the turning radius. The combination of side guide, wide mast and low cover offer outstanding visibility.

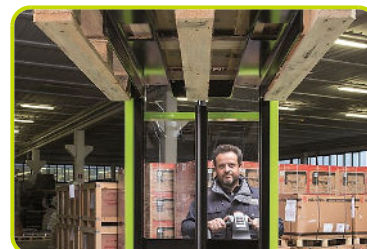

### TILLER EVOLUTION

Fully integrated ergonomic technopolymer tiller system including finger tip throttle and proportional fork controls, safety pushbutton, horn, turtle button, hourmeter, battery status indicator as standard equipment.



### TURTLE MODE SWITCH

Offered as standard, this function enables operating the truck in confined spaces: it allows the unit to travel with the tiller in upright position.

This function is activated by pressing the turtle button on the tiller and rotating the drive control throttle. The truck travels at limited speed.

Release the button to disable this function.



### COVER

Strong ABS cover with storage compartments on top, easily removable to speed up maintenance operations. The bottom access opening enables an immediate disassembly of motor wheel, portal and tiller without lifting the machine. Schuko plug with spiral cable for an easy battery charging.



### BATTERY PACK AGM

A separate compartment is the housing of AGM deep cycle batteries. Such batteries are powerful (110Ah), allow 3 hours endurance and don't need maintenance. GEL batteries available on demand.



### GEL (OPTIONAL)

GEL batteries available on demand.



## Description

|                            |               |    |      |
|----------------------------|---------------|----|------|
| 1.1 Manufacturer           | PR INDUSTRIAL |    |      |
| 1.3 Drive                  | Electric      |    |      |
| 1.4 Operator type          | Pedestrian    |    |      |
| 1.5 Load capacity          | Q             | Kg | 1200 |
| 1.6 Load centre distance   | c             | mm | 600  |
| 1.8 Load axle to end forks | x             | mm | 780  |
| 1.9 Wheel base             | y             | mm | 1234 |

## Weights

|                                       |    |      |
|---------------------------------------|----|------|
| 2.1 Service weight (battery included) | Kg | 618  |
| 2.2 Axle load, laden rear             | Kg | 1187 |
| 2.2 Axle load, laden front            | Kg | 631  |
| 2.3 Axle load, unladen front          | Kg | 456  |
| 2.3 Axle load, unladen rear           | Kg | 162  |

## Tyres/Chassis

|                                                    |        |      |         |
|----------------------------------------------------|--------|------|---------|
| 3.1 Tyres: front wheels                            |        |      | RUBBER  |
| 3.1 Tyres: stabilizers wheels - front              |        |      | POLY.C. |
| 3.1 Tyres: rear wheels                             |        |      | POLY.C. |
| 3.2 Tyre size: Steering wheels - Width             | mm     | 76   |         |
| 3.2 Tyre size: Steering wheels - Diameter          | mm     | 250  |         |
| 3.3 Tyre size: Load rollers - Diameter             | mm     | 82   |         |
| 3.3 Tyre size: Load rollers - Width                | mm     | 70   |         |
| 3.4 Tyre size: stabilizers wheels front - Diameter | mm     | 100  |         |
| 3.4 Tyre size: stabilizers wheels front - Width    | mm     | 38   |         |
| 3.5 Tyre size: rear wheels - Q.ty (X=driven)       | nr     | 2    |         |
| 3.5 Tyre size: front wheels - Q.ty (X=driven)      | nr     | 1x+1 |         |
| 3.6 Tread, front                                   | b10 mm | 565  |         |
| 3.7 Tread, rear                                    | b11 mm | 410  |         |

## Dimensions

|                                            |     |    |      |
|--------------------------------------------|-----|----|------|
| 4.2 Height, mast lowered                   | h1  | mm | 2250 |
| 4.3 Normal free lifting                    | h2  | mm | 80   |
| 4.4 Lift height                            | h3  | mm | 3410 |
| 4.5 Height, mast extended                  | h4  | mm | 3916 |
| 4.9 Height of tiller in drive position min | h14 | mm | 960  |
| 4.9 Height of tiller in drive position max | h14 | mm | 1330 |
| 4.15 Height, lowered                       | h13 | mm | 90   |
| 4.19 Overall length                        | l1  | mm | 1760 |
| 4.20 Length to face of forks               | l2  | mm | 609  |
| 4.21 Overall width                         | b1  | mm | 800  |
| 4.22 Fork dimensions - Thickness           | s   | mm | 70   |
| 4.22 Fork dimensions - Width               | e   | mm | 150  |
| 4.22 Fork dimensions - Length              | l   | mm | 1150 |
| 4.24 Fork carriage width                   | b3  | mm | 650  |
| 4.25 Distance between fork arms            | b5  | mm | 560  |
| 4.32 Ground clearance, centre of wheelbase | m2  | mm | 20   |
| 4.34 Aisle width                           | Ast | mm | 2210 |
| 4.35 Turning radius                        | Wa  | mm | 1430 |

## Performance data

|                              |          |      |
|------------------------------|----------|------|
| 5.1 Travel speed laden       | Km/h     | 4.7  |
| 5.1 Travel speed unladen     | Km/h     | 5.2  |
| 5.2 Lifting speed laden      | m/s      | 0.11 |
| 5.2 Lifting speed unladen    | m/s      | 0.19 |
| 5.3 Lowering speed laden     | m/s      | 0.25 |
| 5.3 Lowering speed unladen   | m/s      | 0.3  |
| 5.8 Max gradeability laden   | %        | 5    |
| 5.8 Max gradeability unladen | %        | 10   |
| 5.10 Service brake           | Electric |      |

## Electric motors

|                                               |       |     |
|-----------------------------------------------|-------|-----|
| 6.1 Drive motor power                         | kW    | 0.7 |
| 6.2 Lift motor power                          | kW    | 2.2 |
| Battery Type                                  | Tipo  | AGM |
| 6.4 Battery voltage                           | V     | 24  |
| 6.4 Battery capacity, Min                     | Ah    | 110 |
| 6.4 Battery capacity, Max                     | Ah    | 110 |
| 6.5 Battery weight, Min                       | Kg    | 76  |
| 6.5 Battery weight, Max                       | Kg    | 80  |
| 6.6 Energy consumption according to VDI cycle | kWh/h | 0.9 |
| 8.4 Sound level at driver's ear               | dB(A) | 62  |

## Residual lifting capacity

|                             |    |      |
|-----------------------------|----|------|
| Lifting height (H3) 2500 mm | Kg | 1200 |
| Lifting height (H3) 2900 mm | Kg | 800  |
| Lifting height (H3) 3500 mm | Kg | 600  |

