HX Agile EVO

HIGH LIFT PALLET TRUCK - FULL ELECTRIC




ERGONOMICS AND EASE OF USE

Ideal to move and position goods at an ergonomic working height, HX AGILE EVO combines the ERGONOMICS of the scissor lift pallet truck with the EASE OF USE of the lithium electric pallet truck, allowing loads to be lifted up to 800 mm, becoming a practical and versatile workbench. Comfortable and easy to drive, it is designed to simplify the operator's work processes, prevent fatigue through ergonomics and protect health by minimizing strain. In addition, it allows loaded goods to be moved thanks to its electric drive for convenient usability.



FLEXIBILITY

The scissor lift pallet truck provides a flexible multi-work station which can be used in different locations depending on your working environment or loading stations. Once lifted, HX Agile can be used in aisle replenishment in supermarkets, offering a viable and economical alternative to the state-of-the-art (stacker). It is perfect for use as an ergonomic handling aid or a practical work platform suitable for places such as machine workshops. This pallet truck is also ideal to carry out the support function and material supply along the assembly and production lines.

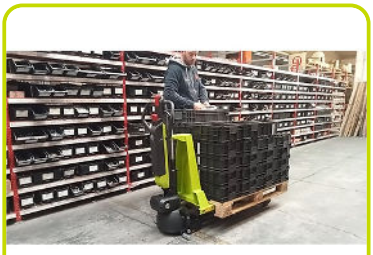

LI-ION BATTERY

Easily removable, **lightweight**, high-energy efficiency and totally **maintenance-free**, it can be fully or partially recharged, ensuring great productivity.

Two types of charger available (bench and wall mounted) with standard and fast charging time.



- **3H AUTONOMY**: Continuous running with 600 kg average load at full speed.
- **RECHARGE**: Fast and occasional, depending on the combination of battery and charger.
- **CONTINUOUS RUNNING** using spare additional battery.



www.pramac.com

EXCEPTIONAL MANEUVERABILITY

The the great maneuverability of HX Agile will immediately help improve your everyday work. Thanks to the compact design (L2 is with battery pack integrated in the wheelhouse) it is ideal for use in any application where space is critical.



USER FRIENDLY FRONT LED INTUITIVE DISPLAY

Equipped with 3 push buttons to make easily settings and read truck activities info. Operator can get information on:

- Battery status of charge (% of charge);
- Timers (total and partial trip hour meter in h);
- Distance traveled (total and partial trip distance in km);
- Speed adjustment (% of max speed);
- Diagnostic page;
- Error page.



100% SAFETY


HX Agile is a reputable tool that cares about user safety. No worries anymore, it works hard for you giving superior results in total safety.

- EASY SPEED ADJUSTMENT: Safe driving performance according to operator's skill level or to workplace requirements.
- SAFETY IN NARROW SPACE: The turtle mode allows for controlled maneuvering in tight spaces.
- DOUBLE WHEELS SYSTEM: The large diameter of the wheels allows great stability and smoothness, preventing the pallet truck from overturning.
- FRONT AND REAR STABILIZERS: To make work even more stable and safer.



OPTIONS

- Additional spare **battery** for continuous use
- **6A fast** battery charger

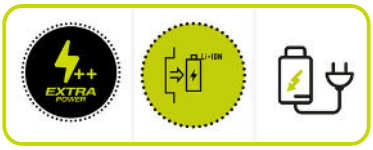

www.pramac.com

Description			
1.1 Manufacturer			LIFTER
1.3 Drive			Electric
1.4 Operator type			Pedestrian
1.5 Load capacity	Q	kg	800
1.6 Load centre distance	c	mm	600
1.8 Load axle to end forks	x	mm	1000
1.9 Wheel base	y	mm	1248

Weights			
2.1 Service weight		kg	131
2.2 Axle load, laden rear		kg	583
2.2 Axle load, laden front		kg	348
2.3 Axle load, unladen front		kg	92
2.3 Axle load, unladen rear		kg	39


Tyres/Chassis			
3.1 Tyres: front wheels			RUBBER
3.1 Tyres: rear wheels			POLY.I.
3.2 Tyre size: Steering wheels - Width		mm	40
3.2 Tyre size: Steering wheels - Diameter		mm	200
3.3 Tyre size: Load rollers - Diameter		mm	80
3.3 Tyre size: Load rollers - Width		mm	50
3.5 Tyre size: rear wheels - Q.ty (X=driven)		nr	2
3.6 Tread, front	b10	mm	162
3.7 Tread, rear	b11	mm	441

Dimensions			
4.4 Lift height	h3	mm	715
4.9 Height of tiller in drive position max	h14	mm	1210
4.9 Height of tiller in drive position min	h14	mm	900
4.15 Height, lowered	h13	mm	85
4.19 Overall lenght	l1	mm	1630
4.20 Lenght to face of forks	l2	mm	480
4.21 Overall width (front/rear)	b1/b2	mm	540
4.22 Fork dimensions - Thickness	s	mm	48
4.22 Fork dimensions - Width	e	mm	160
4.22 Fork dimensions - Lenght	l	mm	1150
4.25 Forks width	b5	mm	540
4.32 Ground clearance, centre of wheelbase	m2	mm	21
4.34 Aisle width	Ast	mm	2127
4.35 Turning radius	Wa	mm	1480

Performance data			
5.1 Travel speed laden		km/h	4.2
5.1 Travel speed unladen		km/h	5.3
5.2 Lifting speed laden		m/s	0.04
5.2 Lifting speed unladen		m/s	0.05
5.3 Lowering speed laden		m/s	0.1
5.3 Lowering speed unladen		m/s	0.03
5.8 Max gradeability laden		%	5
5.8 Max gradeability unladen		%	10
5.10 Service brake			Electric

www.pramac.com

Electric motors			
6.1	Drive motor power	kW	2x0.25
6.2	Lift motor power	kW	0.4
6.4	Battery voltage	V	36
6.4	Battery capacity	Ah	17
8.4	Sound level at driver's ear	dB(A)	60

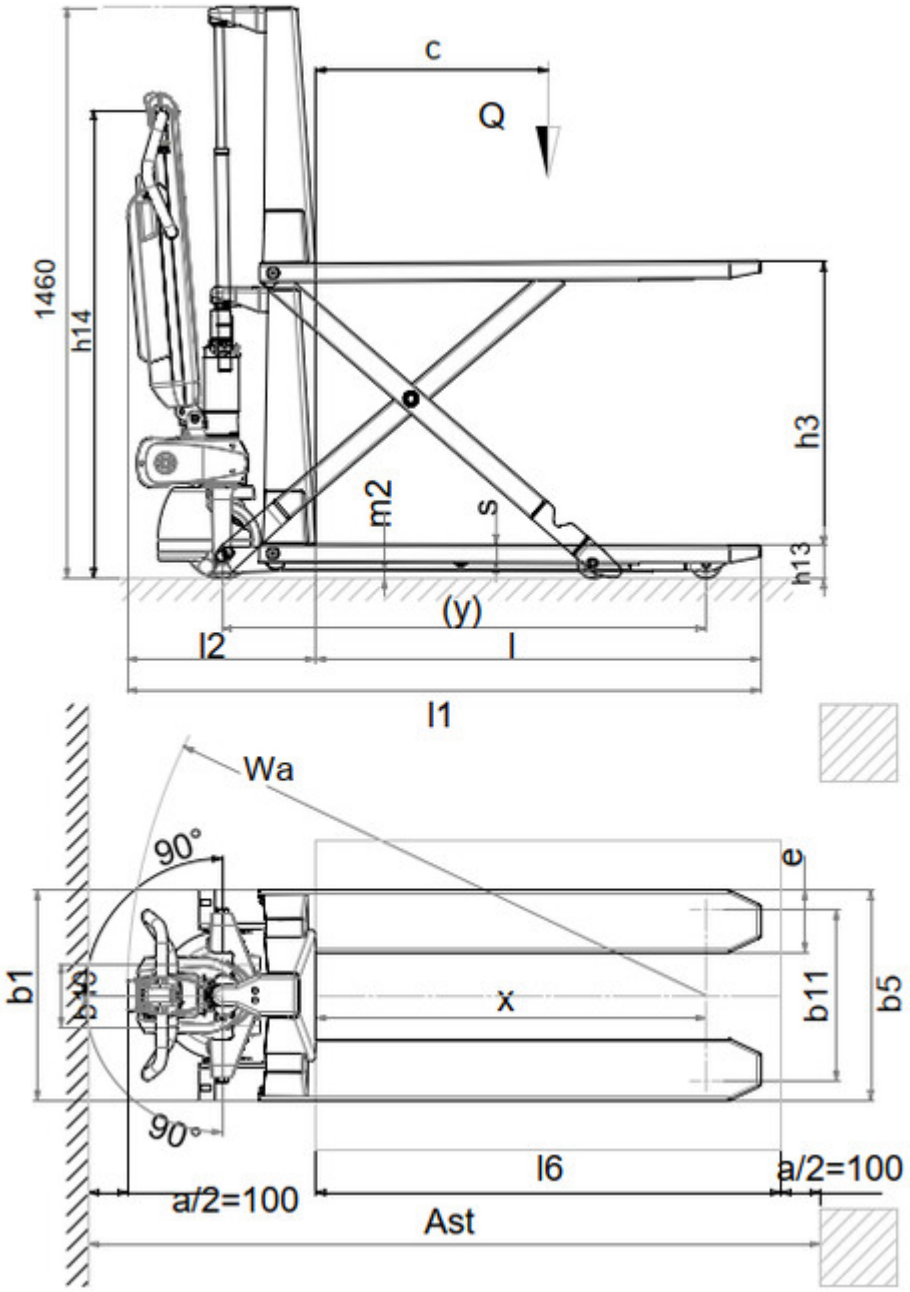

www.pramac.com

The information is aligned with the Data file at the time of download.
Printed on 29/09/2026 (ID 19700)

©2026 | PR Industrial S.r.l. – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice