


Fixed Type Beam Clamp

- **Model: HBC**



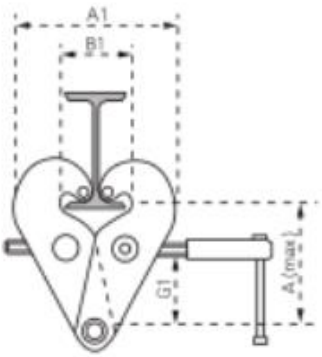

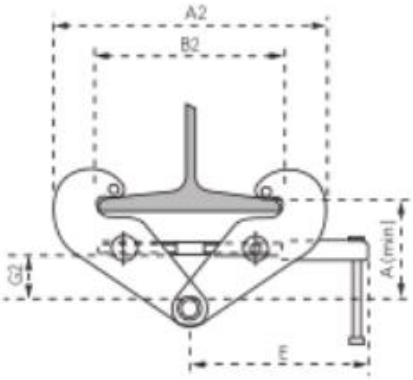



Features:

- Capacity from 1 up to 10 tonne.
- Clamp jaw is designed to reduce flange stress y distributing load away from I-beam flange edge.
- Can be easily mounted with threaded handle.
- Fits a wide range of flange withs and beams.
- Suspension bar provides lower head room.

Model	SWL (kg)	Beam Flange Width b (mm)	Dimensions (mm)												Net Weight (kg)
			Amin	Amax	B1	B2	A1	A2	D	E	G1	G2	H	L	
HBC10	1000	75 – 230	116	151	78	247	186	350	4	215	83	45	20	84	3.9
HBC20	2000	75 – 230	116	151	78	247	186	350	6	215	83	45	20	94	4.7
HBC30	3000	80 – 322	180	225	80	322	232	455	8	255	121	76	22	122	9.2
HBC50	5000	90 – 322	180	225	90	322	242	445	10	255	117	76	28	129	11
HBC100	10,000	90 - 322	176	221	90	322	268	480	12	275	111	67	38	146	17.5

Specifications are for guidance and may change without notice. Always check suitability before use.