
Plain Bar Push Travel Trolley

- **Model: HMT**



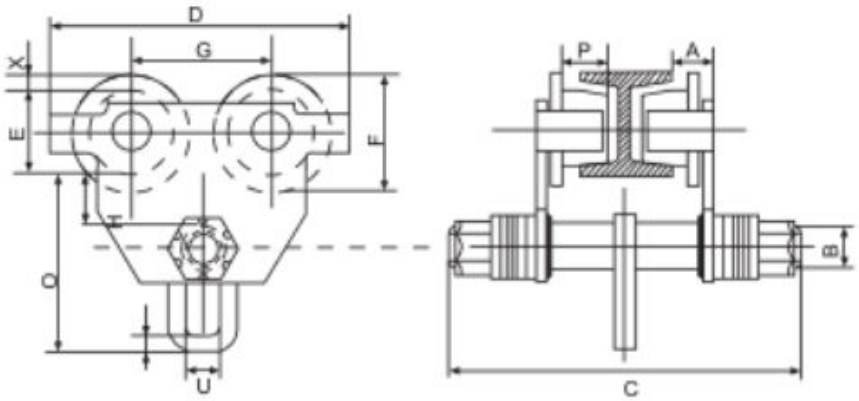

Features:

- Double sealed ball bearings.
- Built-in bumper guards.
- Adjustable to fit various sizes of flange and I-beams.
- Use on straight or curved track.
- Can be installed or removed at any point along the track.

Model	WLL (t)	Beam Flange Width b (mm)	Dimensions (mm)																	Weight (kg)
			O	A	B Ø	C	D	E Ø	F	G	H	T Ø	R	S	L	X	P	N	U	
HMT05	0.5t	64–140	128	22	24	230	212	58	82	102	28	44	6	95	15	12	26	10	24	7
HMT10	1t	64–140	143	25	30	254	255	75	102	118	25	50	8	118	15	13.5	28	12	30.5	12
HMT20	2t	76-165	172	27	36	294	302	90	122	137	27	60	10	145	20	16	34	14	36	22
HMT30	3t	76–203	212	31	42	344	344	110	142	157	32	78	12	180	26	16	38	16	45	30
HMT50	5t	88–203	254	36	48	360	378	122	156	172	34	90	16	220	35	17	44	20	60	55
HMT100	10t	125-203	320	46	60	403	445	151	188	200	35	94	25	285	45	18	48	25	82	93

Specifications are for guidance and may change without notice. Always check suitability before use.