
Screw Bar Push Travel Trolley

- **Model: PT-A**



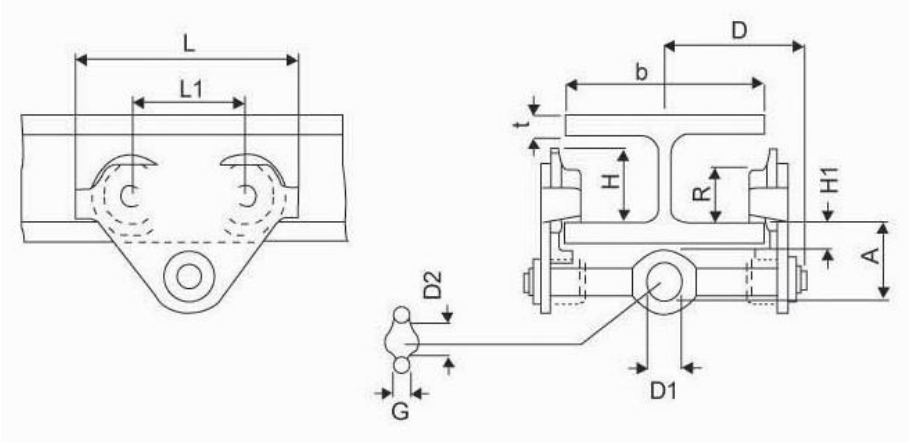

Features:

- Adapts to wide range of beam adjustment by thread.
- Versatile trolley for use with any hook suspended hoist.
- Only intended for industrial use.
- **SHOULD NOT BE USED TP LIFT, SUPPORT, TRANSPORT PEOPLE OR SUSPEN LOADS OVER PEOPLE.**

Model	SWL (kg)	Beam Flange Width b (mm)	Beam Flange Thickness t (mm)	Dimensions (mm)										Net Weight (kg)
				A	G	D1	D2	H	H1	L	L1	R	D	
PT05A	500	50 – 220	25	81.5	12	25	30	67	39.5	199	100	55	140	5.0
PT10A	1000	50 – 220	25	96	16	30	36	81.5	44	246	120	68	151	9.0
PT20A	2000	66 – 220	25	102	20	40	48	94	34	276	132	80	157	15
PT30A	3000	74 – 220	25	128	24	46	58	115.5	46	332	155	100	164	24
PT50A	5000	90 – 220	25	133.5	28	52	65	127	40.5	377	168	110	173	36

Specifications are for guidance and may change without notice. Always check suitability before use.