
Screw Bar Geared Travel Trolley

- **Model: SG-A**



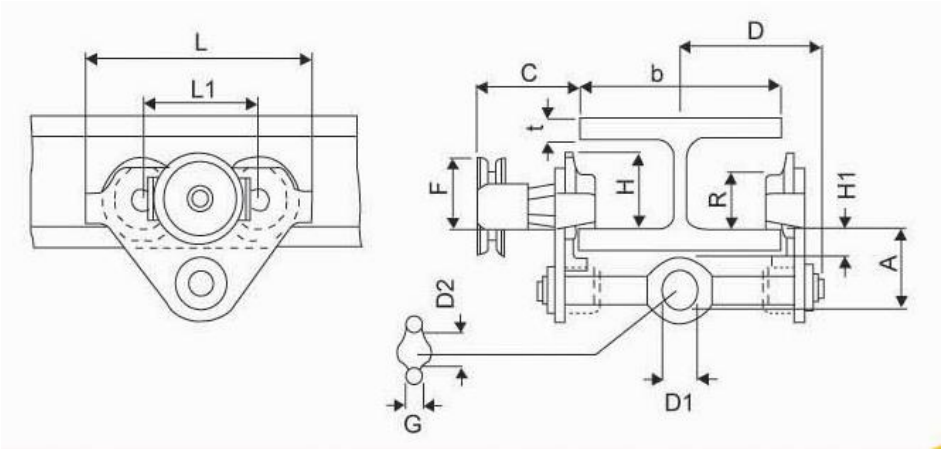

Features:

- Adapts to wide range of beam adjustment by thread.
- Cast iron universal tread wheels for use on flat or tapered flange beams.
- Sealed 'Lube for Life' ball bearings.
- Wheel adjustments will fit most I.S.W and I-beams or patented track.
- Effective for precise spotting jobs.
- Equipped with a 3m drop chain.

Model	SWL (kg)	Beam Flange Width b (mm)	Beam Flange Thickness t (mm)	Dimensions (mm)												Net Weight (kg)
				A	C	G	D1	D2	F	H	H1	L	L1	R	D	
SG05A	500	50 – 220	25	81.5	74	12	25	30	65	67	31.5	199	100	55	140	9.0
SG10A	1000	50 – 220	25	96	78	16	30	36	65	81.5	33	246	120	68	151	13.0
SG20A	2000	66 – 220	25	102	81	20	40	48	69	94	34	270	132	80	157	18.0
SG30A	3000	74 – 220	25	128	86	24	46	58	100	115.5	35	332	155	100	164	27.0
SG50A	5000	90 – 220	25	133.5	92	28	52	65	104	127	37	377	168	110	173	40.5

Specifications are for guidance and may change without notice. Always check suitability before use.