
Trolley Clamp

- **Model: TC**



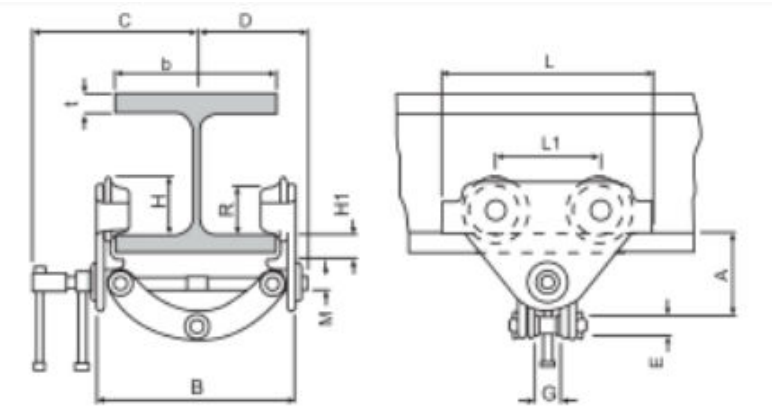

Features:

- The easy installation to any beam, suitable for fixing to any moving hoist, pulleys and loads.
- Can be adjusted quickly to the beam width by turning the main spindle.
- Safety is ensured by the locking lever.
- The spindle and snap-pin stops are galvanised to protect against corrosion.

Model	Capacity (kg)	Flange Width b (mm)	Dimensions (mm)												Weight (kg)
			A	G	E	H1	H	L	L1	M	R	C	D	t max	
TC10A	1000	61 – 151	81-108	26	22	20	53	160	75	M12	46	153	105	15	2.5
TC20A	2000	74 – 200	89-154	42	20	30	71.5	260	130	M18	60	205	139	25	9.9
TC30A	3000	75 – 200	128-171	50	22	30.5	95.5	310	150	M24	80	220	155	25	17.5

Specifications are for guidance and may change without notice. Always check suitability before use.