
# Grade 8 Omega Link.

- **Model: T-002**



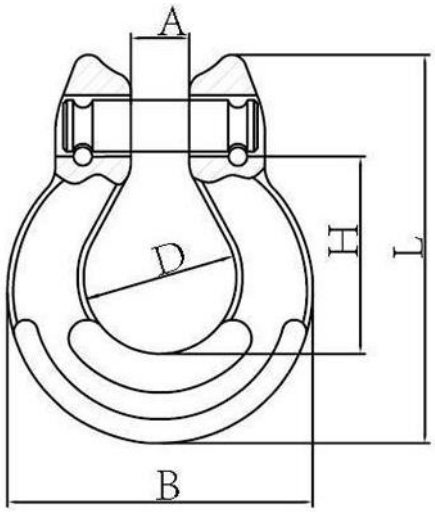


**Features:**

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

| Part Code | ChainØ (mm) | A (mm) | B (mm) | D (mm) | H (mm) | L (mm) | WLL (t) | Weight (kg) |
|---|---|---|---|---|---|---|---|---|
| T-002/6 | 6 | 8 | 41 | 20.5 | 25 | 52 | 1.12 | 0.12 |
| T-002/7-8 | 7/8 | 10 | 52 | 23.5 | 35 | 68.5 | 2.00 | 0.22 |
| T-002/10 | 10 | 12 | 62 | 31.5 | 40.5 | 81 | 3.15 | 0.36 |
| T-002/13 | 13 | 15 | 81 | 41 | 54 | 108 | 5.30 | 0.71 |
| T-002/16 | 16 | 19 | 99 | 49.5 | 64 | 126 | 8.00 | 1.3 |
| T-002/20 | 20 | 23 | 118 | 58 | 75.6 | 152 | 12.50 | 2.2 |



Specifications are for guidance and may change without notice. Always check suitability before use.