
Grade 8 Barrel Hook.

- **Model: T-022**



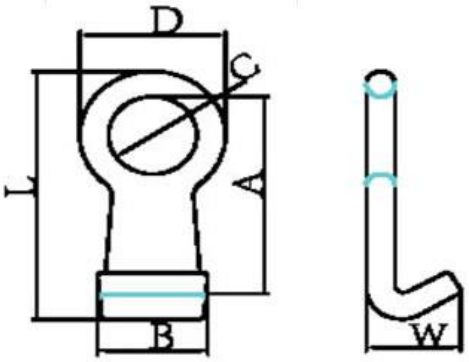

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	A (mm)	B (mm)	C (mm)	D (mm)	L (mm)	W (mm)	WLL (t)	Weight (kg)
T-024/1T	109	60	38	71	118.5	59	1	0.55
T-024/2T	102	50	40	66	128	43	2	0.55

Specifications are for guidance and may change without notice. Always check suitability before use.