
Grade 8 Master Link.

- **Model: T-033**



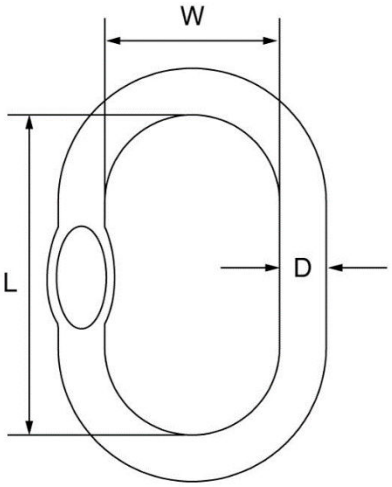

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)		L (mm)	W (mm)	D (mm)	WLL (t)	Weight (kg)
	Single Leg	Double Leg					
T-033/7-6	7	6	110	60	13	1.6	0.34
T-033/8-7	8	7	110	60	16	2.12	0.54
T-033/10-8	10	8	135	75	18	3.15	0.82
T-033/13-10	13	10	160	90	22	5.3	1.5
T-033/16-13	16	13	180	100	26	8	2.3
T-033/18-16	18	16	200	110	32	11.2	3.95
T-033/20-18	20	18	260	140	36	14	6.34
T-033/22-20	22	20	300	160	40	17	8.96
T-033/26-22	26	22	340	180	45	21.2	12.8
T-033/32-26	32	26	350	190	50	31.5	16.55

Specifications are for guidance and may change without notice. Always check suitability before use.