

Grade 8 Clevis Type Shortening Clutch.

- **Model: T-073**



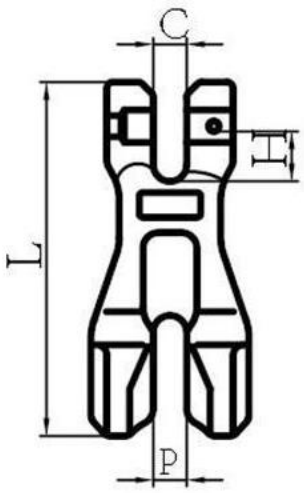

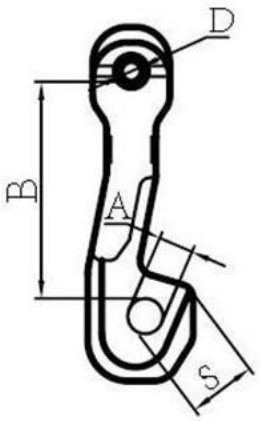

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	P (mm)	C (mm)	A (mm)	B (mm)	H (mm)	S (mm)	L (mm)	D (mm)	WLL (t)	Weight (kg)
T-073/6	6	7.5	7.5	8	44	10.3	12	73.5	7.8	1.12	0.17
T-073/7-8	7/8	9.5	9.5	10.5	61.7	14	17	101	9.2	2	0.37
T-073/10	10	13	13	12.4	92	18.4	28	138	13.2	3.15	0.97
T-073/13	13	16.5	16.5	16	115	22.7	34.5	177	16.2	5.3	2.01
T-073/16	16	21	21	19.5	143	28.5	40	220	20	8	3.32
T-073/20	20	23.5	23.5	23	152	33.6	46	238	24.3	12.5	6.2
T-073/22	22	25.5	25.5	26	195	39	57.5	295	28.1	15	8.5

Specifications are for guidance and may change without notice. Always check suitability before use.