
Grade 8 Component Connector.

- **Model: T-074**



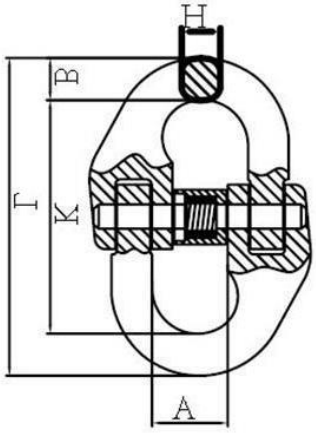

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	A (mm)	B (mm)	L (mm)	K (mm)	H (mm)	WLL (t)	Weight (kg)
T-074/6	6	15	7.5	58	42	7	1.12	0.08
T-074/7-8	7/8	18	9.5	79.5	60.5	8.5	2.00	0.15
T-074/10	10	25	12	90.5	68	11.5	3.15	0.30
T-074/13	13	29	15	117	87	15	5.30	0.65
T-074/16	16	34.5	19.8	148	108.4	19.8	8.00	1.15
T-074/20	20	41	24	169.5	121.5	24	12.50	2.1
T-074/22	22	48	26	193.5	141.5	26	15.00	2.87
T-074/26	26	57.5	31	220	158	30	21.20	4.5
T-074/32	32	67	38	281	205	37	31.50	8.21

Specifications are for guidance and may change without notice. Always check suitability before use.