
Grade 8 Clevis Type Shortening Grab Hook.

- **Model: T-086**



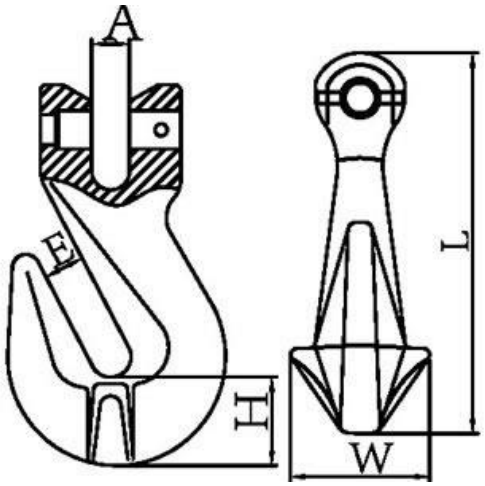

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	E (mm)	A (mm)	H (mm)	W (mm)	L (mm)	WLL (t)	Weight (kg)
T-086/6	6	8.3	8	17.7	26.7	75	1.12	0.25
T-086/7-8	7/8	11	9.5	18.5	33.5	89	2.00	0.32
T-086/10	10	13	12.5	29	46	126	3.15	0.73
T-086/13	13	16.5	15	42.5	57.5	163.5	5.30	1.6
T-086/16	16	19	18.5	45.5	74	183.5	8.00	2.8
T-086/20	20	24	23	56	74	219	12.50	5
T-086/22	22	27	27	68.5	90	254	15.00	6.3
T-086/26	26	30	30	77	102	309	21.20	14.5

Specifications are for guidance and may change without notice. Always check suitability before use.