
Grade 8 Pivoting Eyebolt with Bracket.

- **Model: T-173**

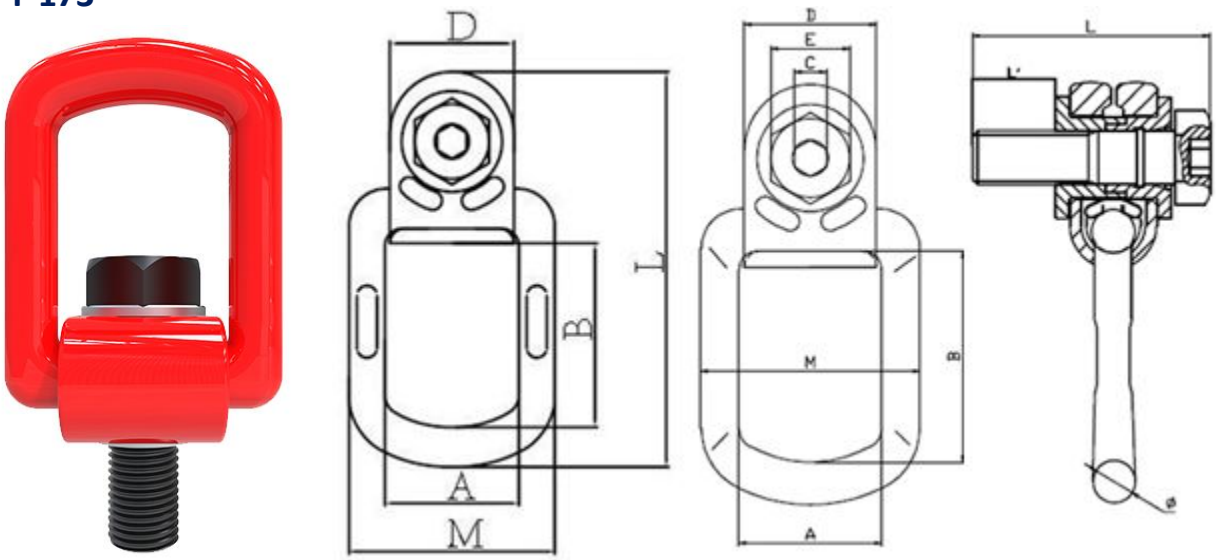

Features:

- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	M (mm)	L (mm)	L' (mm)	Ø (mm)	SWL (t)	Weight (kg)
T-173/M8	35	52.5	6	30	13	45	46	10.4	14	0.3	0.36
T-173/M10	35	52.5	6	30	17	45	52	15.4	14	0.63	0.38
T-173/M12	40	54	8	36	19	68	62	18	18	1	4
T-173/M16	40	54	8	36	19	68	70	24	18	1.5	0.74
T-173/M20	54	80	12	50	30	83	88	30	16	2.5	1.19
T-173/M24	54	80	12	50	30	83.	113	55	16	4	1.12
T-173/M30	73	106	17	68	41	120	132	48	27	5	4.4
T-173/M36	73	106	17	68	41	120	142	54	27	7	4.65
T-173/M42	94	140.5	24	86	65	156	176	72	31	10	8.2

Specifications are for guidance and may change without notice. Always check suitability before use.