
Grade 8 Swivel Sling Hook & Latch.

- **Model: T-268**



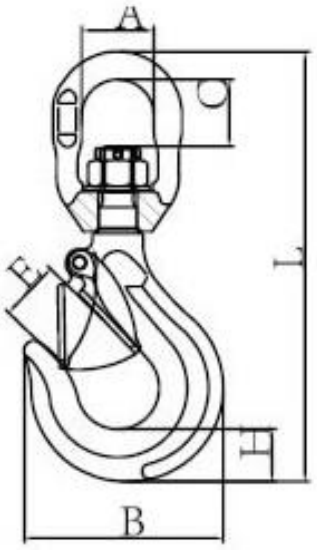

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	A (mm)	B (mm)	E (mm)	H (mm)	C (mm)	L (mm)	WLL (t)	Weight (kg)
T-268/7-8	7/8	36	88.5	27	23.5	26	190	2	0.85
T-268/10	10	42	104.5	32	29.5	34	233	3.15	1.54
T-268/13	13	49	135	40	38	41	291.5	5.3	3.04
T-268/16	16	61	161	45	45.4	53	352	8	5.36

Specifications are for guidance and may change without notice. Always check suitability before use.