
Grade 8 Clevis Reeving Link.

- **Model: T-270**



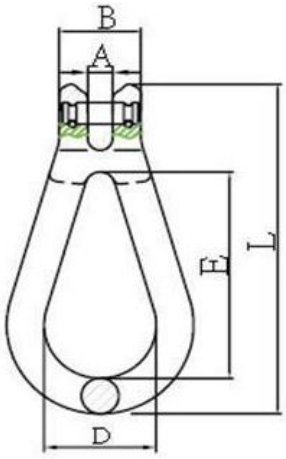

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	A (mm)	B (mm)	D (mm)	E (mm)	L (mm)	WLL (t)	Weight (kg)
T-270/7-8	7/8	10	32.8	45	87	139	2	0.533
T-270/10	10	12	42	60	108	174	3.15	0.74
T-270/13	13	16.5	55.5	66.5	137.5	228	5.3	1.76
T-270/16	16	19	68	72	165	264	8	2.8

Specifications are for guidance and may change without notice. Always check suitability before use.