

Grade 8 Swivel Eyebolt with Ring.

- **Model: T-303**



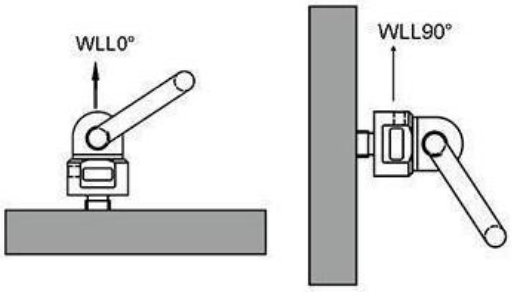

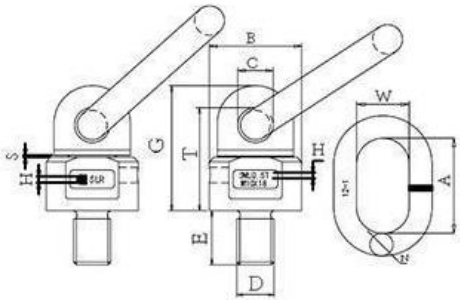

Features:

- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	DxE (mm)	B (mm)	C (mm)	G (mm)	T (mm)	A (mm)	W (mm)	N (mm)	H (mm)	S (mm)	SWL 90° (t)	SWL 0° (t)	Weight (kg)
T-303/8	8 x 13	36	16.5	51	41	55	30	14	3	1	0.3	0.6	0.41
T-303/10	10 x 18	36	16.5	51	41	55	30	14	3	1	0.5	0.9	0.43
T-303/12	12 x 18	36	16.5	51	41	55	30	14	3	1	0.5	1	0.44
T-303/14	14 x 20	36	16.5	51	41	55	30	14	3	1	1.12	2	0.45
T-303/16	16 x 35	36	16.5	52	42	55	30	14	3	1	1.12	2	0.46
T-303/20	20 x 30	4.95	19	68	56	70	35	16	3.5	1	2	4	0.96
T-303/24	24 x 40	57	22	78	65.5	85	40	18	3.5	1.5	3.15	6.3	1.45
T-303/30	30 x 35	66	23.5	96.5	80.5	85	40	20	4	1.5	5.3	10.6	2.17
T-303/36	36 x 90	80	27	109	89.5	115	50	22	6	2	8	11.8	4.17
T-303/42	42 x 50	80	27	109	89.5	115	50	25	6	2.5	10	15	3.62

Specifications are for guidance and may change without notice. Always check suitability before use.