
Grade 8 Weld on Pivoting DEE Link.

- **Model: T-344**



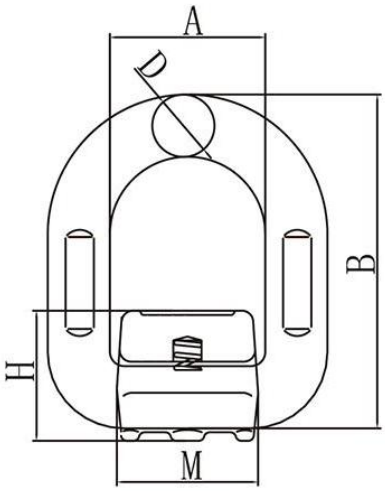

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	A (mm)	B (mm)	D (mm)	M (mm)	H (mm)	WLL (t)	Weight (kg)
T-344/1T	41	78.5	13	37	35	1.12	0.4
T-344/2T	42	88	14	40	37	2	0.47
T-344/3T	45	94	17	42.5	40	3.15	0.69
T-344/5T	55	118	22	61	52	5	1.46
T-344/8T	70	141	26.5	70.5	57	8	2.52
T-344/10T	85	168	28	78	62.5	10	3.59
T-344/15T	97	188	34	90	77	15	5.79

Specifications are for guidance and may change without notice. Always check suitability before use.