Grade 8 Container Lifting Lugg.

- **Model: T-633**




Features:

- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Specifications are for guidance and may change without notice. Always check suitability before use.


TITAN
CHAIN COMPONENTS

STRAIGHT

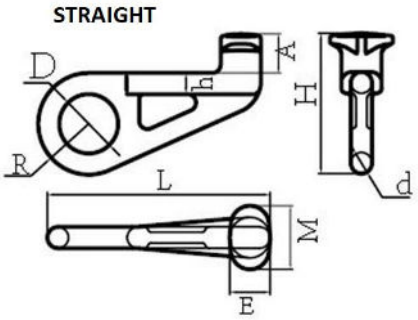


Part Code	A (mm)	M (mm)	H (mm)	h (mm)	E (mm)	R (mm)	D (mm)	d (mm)	L (mm)	WLL (t)	Weight (kg)
T-633/S	46	75	166	25	48	60	70	25	265	12.5	4

LEFT

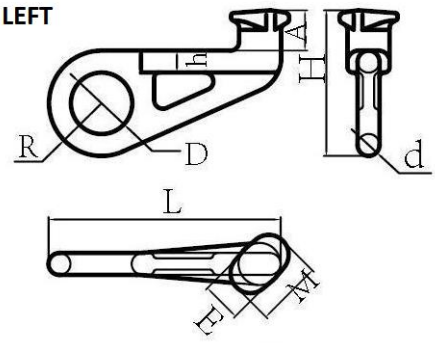

Part Code	A (mm)	M (mm)	H (mm)	h (mm)	E (mm)	R (mm)	D (mm)	d (mm)	L (mm)	WLL (t)	Weight (kg)
T-633/L	46	75	166	25	48	60	70	25	265	12.5	4

RIGHT

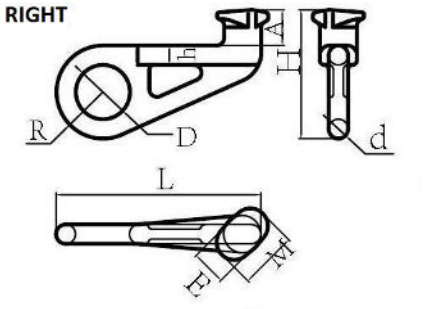

Part Code	A (mm)	M (mm)	H (mm)	h (mm)	E (mm)	R (mm)	D (mm)	d (mm)	L (mm)	WLL (t)	Weight (kg)
T-633/R	46	75	166	25	48	60	70	25	265	12.5	4

Specifications are for guidance and may change without notice. Always check suitability before use.