
Grade 8 Clevis Type Chain Shackle.

- **Model: T-869**



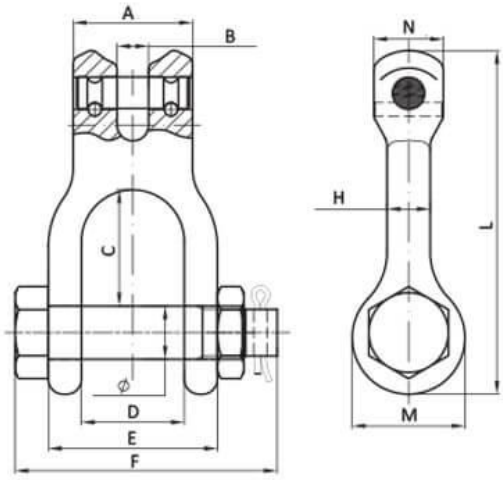

Features:

- All TITAN grade 8 components fully comply with the relevant section of EN1677.
- Complying with EN1677 allow the TITAN components to be used in EN818-4 chain slings.
- Forged with special alloy steel which offers high intensity & toughness, and then it is heat treated.
- Proof load tested to 2.5 times of working load limit.
- Sampling and 20000 times of fatigue testing.
- Strict sampling and breakage testing for each batch of products.
- 100% magnetic powder flaw detection.
- Temperature range of -40°c to +200°c.

Part Code	ChainØ (mm)	A (mm)	B (mm)	C (mm)	Ø (mm)	D (mm)	E (mm)	F (mm)	H (mm)	M (mm)	N (mm)	L (mm)	WLL (t)	Weight (kg)
T-869/7-8	7/8	36	9	35	16	31	51	79	13	34	20	103.5	2	0.48
T-869/10	10	46.5	12	48	20	34	62	95	15.5	15.5	25	130.7	3.15	0.96
T-869/13	13	59	14	64	22	49	83	118	20	44	31	160	5.3	1.64
T-869/16	16	70	19	69.5	28.5	56	95	140	23	55	40	190	8	2.87

Specifications are for guidance and may change without notice. Always check suitability before use.