K24

FEATURES

- FLOW RATE INDICATION
- STANDARD AAA BATTERIES
- ROTABLE DISPLAY
- LOW BATTERY CONSUMPTION
- RUBBER PROTECTION

The K24 is PIUSI's exclusive turbine meter. Its compact design, accuracy and ease of use makes this flow meter an excellence in measuring AdBlue®.
It is equipped with a compact and easy readable display that can be rotated in 4 different positions.

PERFORMANCE

UP TO 120 L/MIN	10 BAR MAX
FLOW RATE	OEPRATING PRESSURE
±1%	0,3%
ACCURACY	REPEATABILITY





K24




K24 PULSE METER

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
F0040710A	0,4	0,9	BLISTER	BLISTER	1
F0040721B	0,4	0,9	115X160X135	4,5X3X5,3	1

A AIR · A ANTIFREEZE · Ad AdBlue® · B BIODIESEL · D DIESEL · F FOOD · G GASOLINE · G GREASE · K KEROSENE · O OIL · W WATER · W WINDSCREEN

CHART

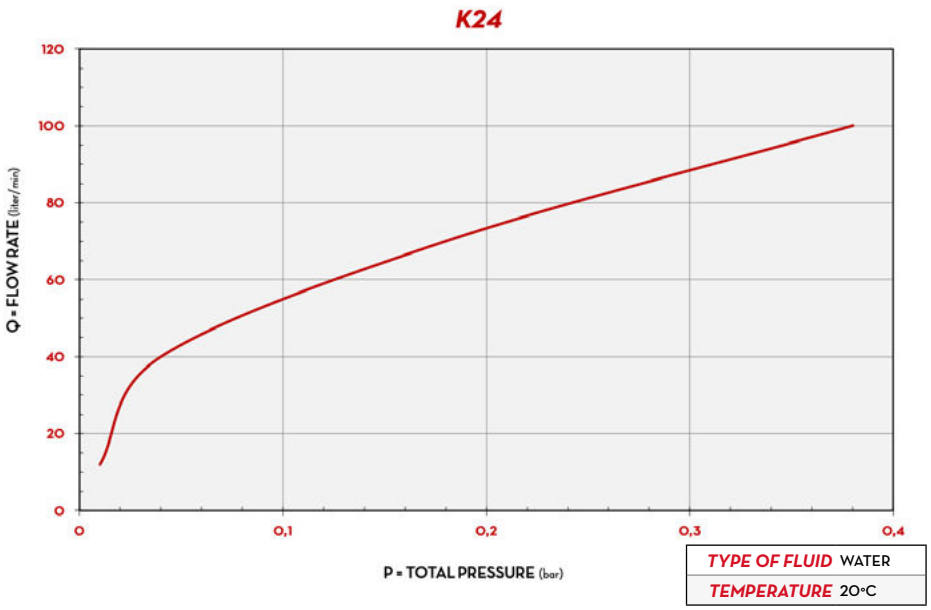

TYPE OF FLUID	WATER
TEMPERATURE	20°C

IN THE BOX


- K24 METER
- STAINLESS STEEL SOCKET
- INSTRUCTION MANUAL

DETAILS


ROTABLE DISPLAY


TURBINE

DIMENSIONS

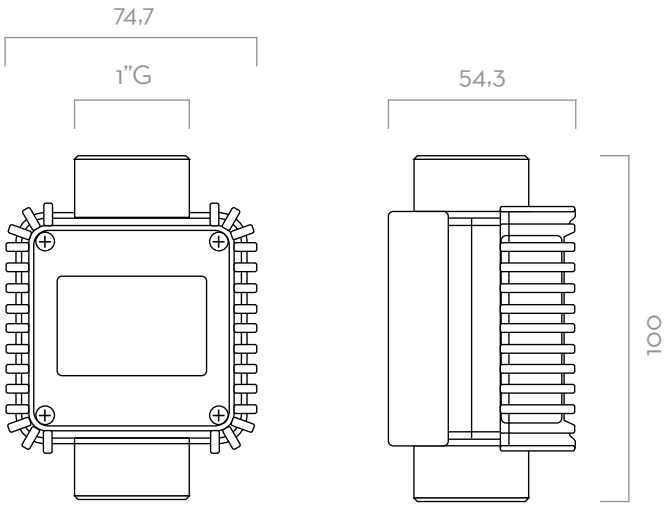

Dimensions expressed in millimeters

MATERIALS

- BODY: TECHNOPOLYMER
- TURBINE: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		PRESSURE		DISPLAY	PULSE OUT (P/L)	
			L/MIN	GPM	BAR	PSI		PULSE VERSION	DISPLAY VERSION
F0040710A	K24 METER (1 SOCKET)	Ad W	5 - 100	1,3-26,4	10	145	YES	-	-
F0040721B	K24 PULSE-METER (1 SOCKET) (87,73 PULSE/L)	Ad W	5 - 100	1,3-26,4	10	145	NO	88	-