K24

FEATURES

- BURSTING PRESSURE 100 BAR
- LCD DISPLAY
- FLOW RATE INDICATION
- EASY TO CALIBRATE

The PIUSI K24 is a turbine digital flow meter specifically designed for diesel. Easy to install in-line or at the end of a delivery pipe, it is equipped with a rotatable display. This meter is available both with aluminium or technopolymer body.

BIO diesel · PIUSI · ANY BIODIESEL · STANDARD VERSION (F00408100) COMPATIBLE WITH ANY BIODIESEL

PERFORMANCE

7-120 L/MIN	20 BAR MAX
FLOW RATE	OPERATING PRESSURE
± 1%	0,2%
ACCURACY	REPEATABILITY





K24



K24 plastic version




K24 PULSER

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
K24					
F0040700A	0,5	1,1	BLISTER	BLISTER	1
F00408100	0,5	1,1	BLISTER	BLISTER	1
K24 PULSER					
F00407022A	0,5	1,1	115X160X135	4,5X6,3X5,3	1

ANY BIODIESEL · AIR · ANTIFREEZE · AdBlue® · BIODIESEL · DIESEL · FOOD · GASOLINE · GREASE · KEROSENE · OIL · WATER · WINDSCREEN

CHART

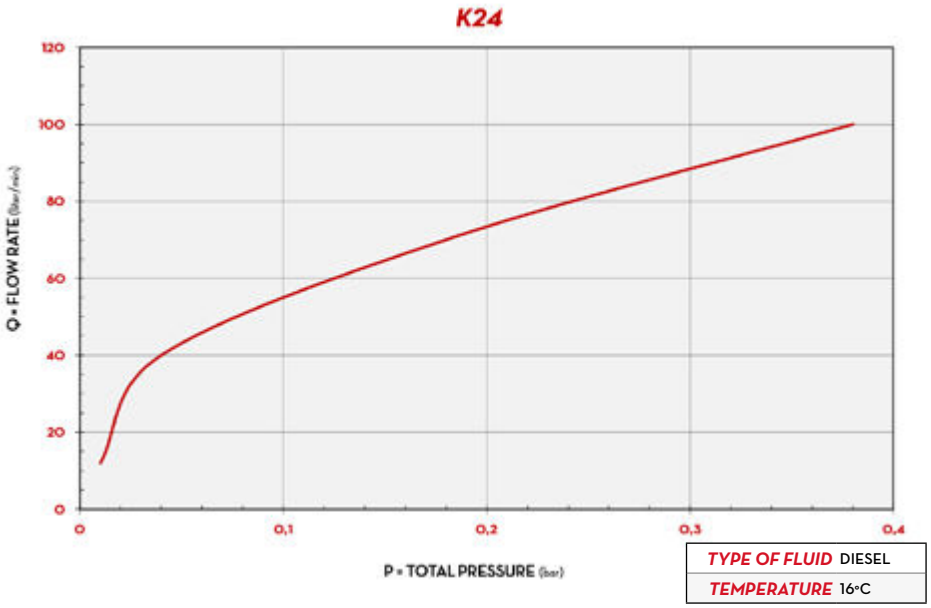

TYPE OF FLUID	DIESEL
TEMPERATURE	16°C

IN THE BOX


- K24 METER
- INSTRUCTION MANUAL

DETAILS


ROTABLE DISPLAY


BI-DIRECTIONAL



TURBINE PULSE METER


SOCKET F/F

MATERIALS

- BODY: ALUMINIUM
- GEARS: TECHNOPOLYMER

DIMENSIONS

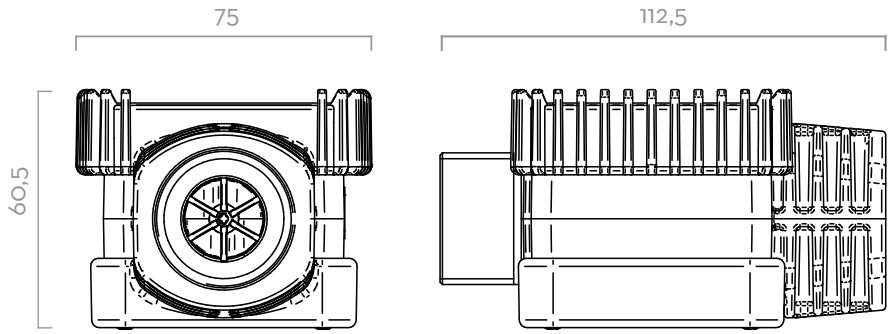

Dimensions expressed in millimeters

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		PRESSURE		BATTERY	FLANGE	INLET / OUTLET
			L/MIN	GPM	BAR	PSI	2X AAA BATTERY 1,5V (INCLUDED)		
K24									
F0040700A	K24 METER M/MF LITER BLACK 1INBSP	D	7 - 120	2 - 32	10	150	YES	NO	M 1" BSP - M 1" BSP
F0040810O	K24 M/F 1" BSP	D	7 - 120	2 - 32	20	300	YES	NO	M 1" BSP - F 1" BSP
K24 PULSER									
F0040722A	K24 PULSER M/MF LITER BLACK 1INBSP	D	7 - 120	2 - 32	10	150	NO	NO	M 1" BSP - M 1" BSP

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PRINT
N° 2X1,5V BATTERY INCLUDED