DyMac GLOBAL

POWER GENERATION



Model:

MPI-BL20SBS (Single Phase)

MacPower industrial

MODEL : MPI-BL20SBS Standby (Single Phase)



Overview

The MacPower Industrial range of Standby Generators Sets comes equipped with Baudouin Engine & Leroy Somer Alternator from DyMac and have been specifically designed to meet the rigours of the industrial and construction industries world wide. The overall Generators design are robust, compact and hard wearing. The base frame is fully bunded to 110% and comes complete with an integrated fork lift pocket design.

The DyMac MPI has a silent canopy, designed to achieve maximum noise level reduction as well as a perfect cooling of the engine insuring its full rating is achieved under full load conditions.

The exhaust silencer is residential type and mounted internally. The canopy is made of carbon sheet steel pre-treated before being powder coated and is suitable also for use in tropical environments its strong structure is fully bolted and all panels can be easily and individually removed.

Power Rating

Emergency Standby Power ESP	20kVA
Emergency Standby Power ESP	16kW
Prime Power PRP	18kVA
Prime Power PRP	14.4kW
Frequency	50Hz
Voltage	230V
Phases	1№
Power Factor	0.8 cos Φ
Rated Current at 230V- (A/Ph)	87A
Fuel	Diesel
[50Hz] Exhaust Emission Level	Standby

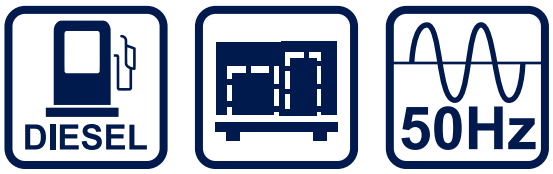

Engine Specifications

Engine Brand	Baudouin
Model	4M06G20/5
Engine Cooling System	Water Cooled
No. of Cylinder and Disposition	4
Displacement	2300cm³
Aspiration	Natural Direct Injection
Speed Governor	Mechanical & Electrical
Coolant Capacity	5L
Electric Circuit	12V
Fuel	Diesel

*The information listed in this document is for illustration purposes only and may be subject to change without notice. Users are responsible for verifying its suitability for their needs.

Engine Data	50Hz
[50Hz] Operating Speed-Nominal	1500 rpm
[50Hz] Exhaust Emission Level	Standby
[50Hz] Specific Fuel Consumption 75% ESP	4.1L/h

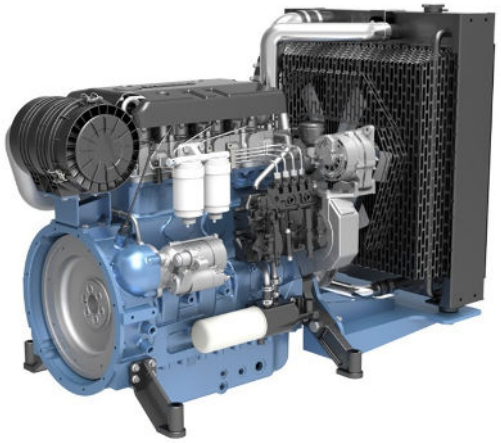

Alternator Specifications

Alternator	Leroy Somer
Model	TAL-A42-C
Type	Brushless (Shunt), Self Excited System
Class	H
IP Protection	23
Insulation Protection Systems	Protection System 1
Poles	4
Winding Leads	12
Voltage Regulation System	Electronic
Voltage Tolerance	±1%



*The information listed in this document is for illustration purposes only and may be subject to change without notice. Users are responsible for verifying its suitability for their needs.

Fuel Tank Autonomy

Fuel Tank Location	Internal
Fuel Tank Material	Carbon steel
Fuel Tank Capacity	70L
[50Hz 400V] Fuel Consumption 75% ESP	4.1L/h
[50Hz 400V] Running Time 75% ESP	17H
[50Hz 400V] Fuel Consumption 100% ESP	5.2L/h
[50Hz 400V] Running Time 100% ESP	13H

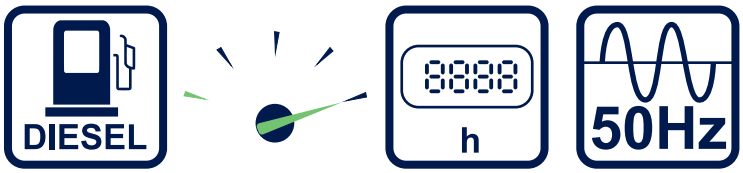

Control System

Controller Brand	Deepsea
Model	DSE7320 MKII
Module	Manual/Auto start/stop module
Standard Function	Engine control
	Generator monitoring
	Generator protection
	Specification
Display	Frequency
	Battery voltage
	Running hour
Warning/shutdown	Under/over voltage
	Under/over speed
	Under/over frequency
	Low oil pressure
	High water temperature
Communication Port	USB

*The information listed in this document is for illustration purposes only and may be subject to change without notice. Users are responsible for verifying its suitability for their needs.

Automatic Control Panel	ACP - Standard
Synchronizing Control Panel	SCP - Optional

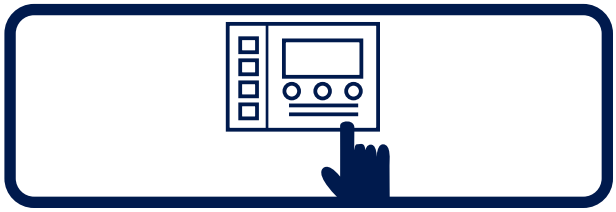



Optional Sockets Module

Protection	Protected with Schneider RCBOs
Sockets	1 x 16A 230V 3P P/SKT IP67
Sockets	1 x 32A 230V 3P P/SKT IP67
Sockets	1 X 63A 400V 5P P/SKT IP67





*The information listed in this document is for illustration purposes only and may be subject to change without notice. Users are responsible for verifying its suitability for their needs.

Genset Equipment

Canopy

The DyMac MPI has a silent canopy, designed to achieve maximum noise level reduction as well as a perfect cooling of the engine insuring its full rating is achieved under full load conditions.



Base Frame

Heavy duty base guarantees the highest standards of durability and resistance, painted using a high quality powder coating process.

Fully bunded, able to retain 110% of all the sets fluids, the base frame is provided with integrated fork pockets and drag bar for easy maneuverability and site positioning.

Single Lifting Point

Battery Charging Kit

Earth Rod (Optional)

Document Holder

Hot Parts Protections

Jacket Water Heater



Fuel Tank (110% bunded)

Heavy Duty Water Separator Fuel Filter (Optional)

Micro-Switch are located at the buzz bar door and main breaker door for emergency shut down

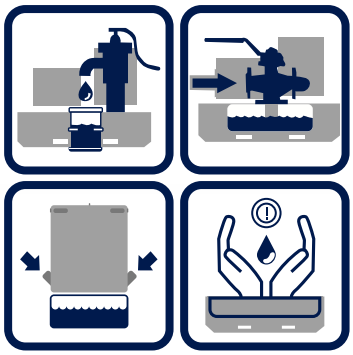

Canopy Version

- Weatherproof Enclosure manufactured using heavy duty steel insuring the engine & alternator is protected from corrosion and aggressive site condition.
- Internal soundproofing is washable & is a fire resistance material.

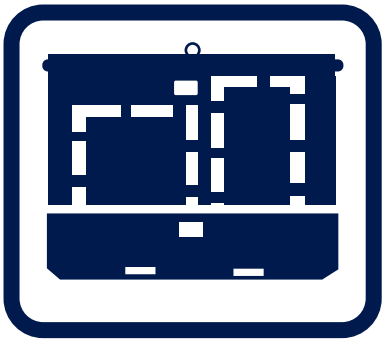

*The information listed in this document is for illustration purposes only and may be subject to change without notice. Users are responsible for verifying its suitability for their needs.

Noise Level 50Hz

Guaranteed Noise Level	97LWA
Noise Pressure Level @ 1 m	83dB(A)
Noise Pressure Level @ 7 m	75dB(A)

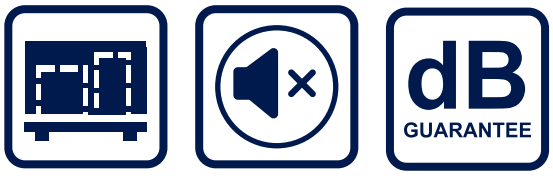

Dimensional Data Canopy Version

Length	2000mm
Width	800mm
Height	1230mm
Weight (Dry)	1000kg
Weight (Wet)	1080kg

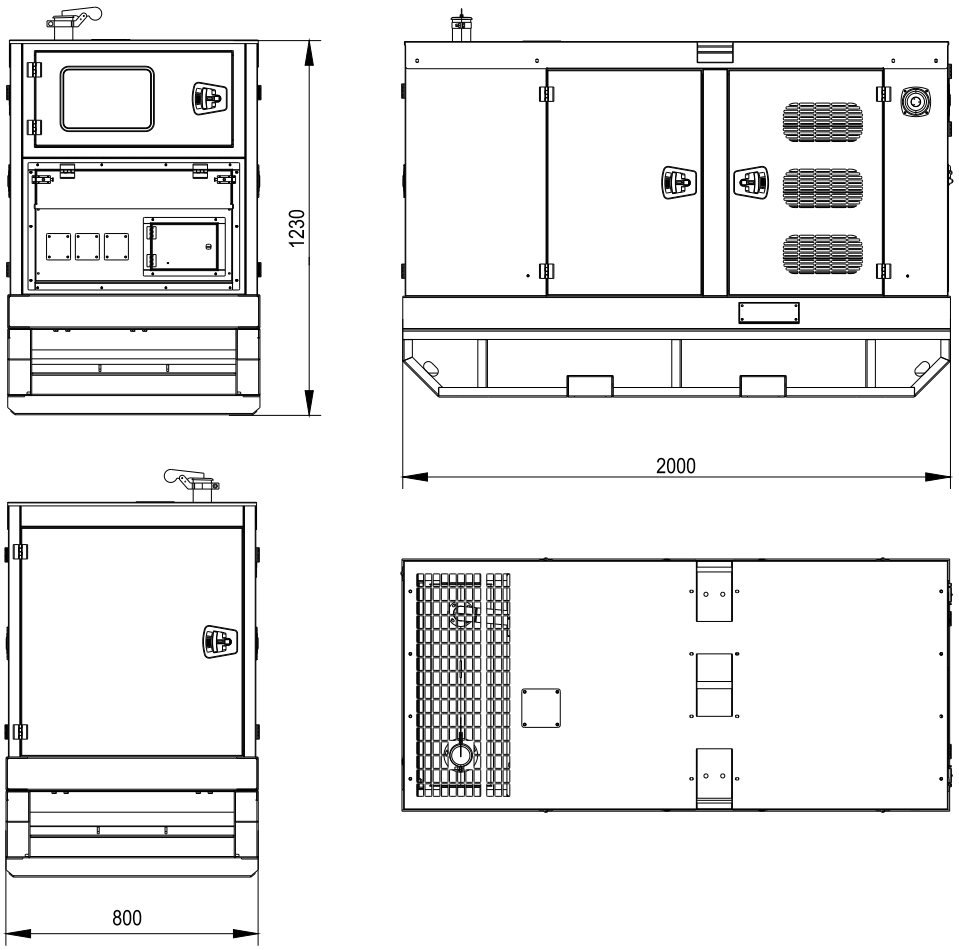

*The information listed in this document is for illustration purposes only and may be subject to change without notice. Users are responsible for verifying its suitability for their needs.

Electrical Optional Extras

Internal Canopy Lighting System with Manual Switch	ICL
Control Section Internal Lighting (automatic with door switch)	CLS
DSE890 MKII DSEWebNet ® Gateway 4G (GSM/Ethernet)	RGW2
DSE2157 Output (8) Expansion Module	ARM7
DSE855 USB to Ethernet Communications Device	RGW9
Insulation Monitoring Device (Replace standard differential protection)	IMD
Socket Kit	SPK
Power Lock	PWL

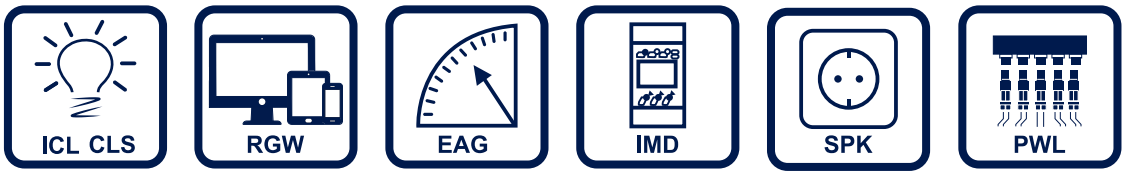

Mechanical Optional Extras

Pre-heating System	PHS
Air Inlet Preheater	APH
Heavy-Duty Air Filter	HDF
Exhaust Spark Arestor ATEX certified	ESA
Air Shut-Off Valve	ASV
Galvanized Sliding Skid	GGS
Base Frame Bumpers	BFB
Lube Oil Drain Pump (Manual)	LDP

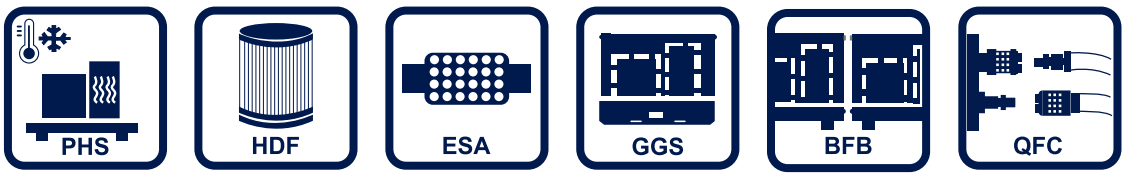

*The information listed in this document is for illustration purposes only and may be subject to change without notice. Users are responsible for verifying its suitability for their needs.

DyMac GLOBAL

DYMAC GLOBAL LTD (IRELAND)
E: sales@dymacglobal.com
T: +353 1 442 0516
Unit 2,
RIVERSDALE INDUSTRIAL ESTATE
BLUEBELL AVENUE, DUBLIN 12
IRELAND
D12 KH67

DYMAC GLOBAL LTD (UK)
E: sales@dymacglobaluk.com
T: +44 300 303 3353
SNARESTONE ROAD
NEWTON BURGOLAND
LEICESTERSHIRE
UNITED KINGDOM
LE67 2SN