
acecube pro
Dual Fluid

Model (ACP-DF-2570/250L) (679/66G)

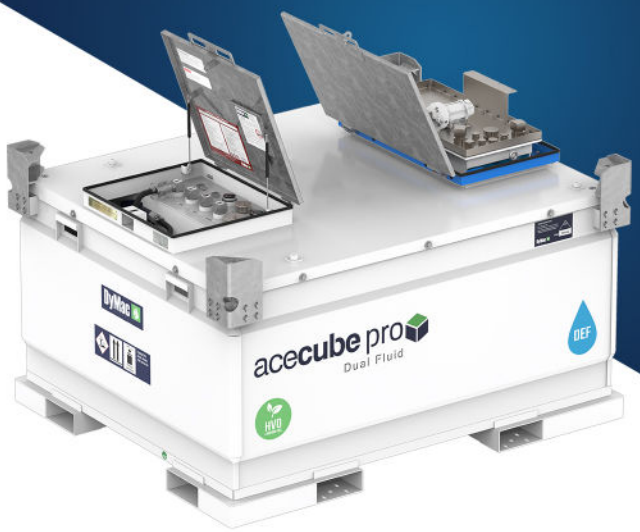

The AceCube Pro Dual Fluid ACP-DF-2750/250L tank is designed for the safe and secure transporting and storage of various industrial lubricants and hazardous liquids worldwide.

Specifications	Metric	US	Imperial
Capacity	2543 Litres	672 Gallons	559 Gallons
Length	2300 mm	7ft 6"	7ft 6"
Width	1885 mm	6ft 2"	6ft 2"
Height	1295 mm	4ft 2"	4ft 2"
Outer Tank Thickness	3 mm	11 Gauge	11 Gauge
Inner Tank Thickness	3 mm	11 Gauge	11 Gauge
Weight, Tare	1183 kg	2608 lbs	2608 lbs
Weight, Laden	3539 kg	7802 lbs	7802 lbs
Safe Fuel Fill Level	2415 Litres	638 Gallons	531 Gallons

Approvals and Certifications

UK & Europe

- ✓ Adhering to ADR regulations
- ✓ (IBC) Intermediate Bulk Containment
- ✓ UN 31 A/Y Compliant Design
- ✓ Lifting when Full
- ✓ Vibration Tested
- ✓ CE Marked
- ✓ Pressure Tested

USA & Canada

- ✓ Adhering to ADR regulations
- ✓ Lifting when Full
- ✓ Vibration Tested
- ✓ UN 31 A/Y Compliant Design
- ✓ (IBC) Intermediate Bulk Containment
- ✓ UL 142 Compliant Design
- ✓ ULC S601-14 & S653
- ✓ Pressure Tested
- ✓ US DOT & TRANSPORT CANADA Approvals

The information listed in this document is for illustration purposes only and may be subject to change without notice. Users are responsible for verifying its suitability for their needs.