
Crosby®

G-2150



- Working Load Limit and Grade 6 permanently shown on every shackle.
- Forged, Quenched & Tempered, with alloy pins.
- Hot-dip galvanized. 85 ton shackles have hot-dip galvanized bows and the bolts are Dimetcoted® and painted red.
- Sizes 3/8 inch and below are mechanically galvanized.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit. (1/2t - 55t).
- Approved for use at -40° C (-40 degrees F) to 204° C (400° F).
- Meets or exceeds all requirements of ASME B30.26.
- Sizes 1/2 - 25t meet the performance requirements of EN13889:2003.
- Shackles 55 metric tons and smaller can be furnished proof tested with certificates to designated standards, such as ABS, DNV, Lloyds, or other certification when requested at time of order.
- Type Approval certification in accordance with ABS Marine Vessel Rules, ABS Mobile Offshore Units, and ABS Guide for the Certification of Lifting Appliances available. Certificates available when requested at time of order and may include additional charges.
- Meets the performance requirements of Federal Specification RR-C-271, Type IVB, Grade A, Class 3, except for those provisions required of the contractor.
- All 2150 shackles can meet charpy requirements of 42 Joules (31 ft-lb) avg at -20° C (-4° F) upon special request.
- These shackles incorporate QUIC-CHECK® angle indicators. (For detailed information, see the Crosby Value Added page at the beginning of this section.)
- Look for the Red Pin®... the mark of genuine Crosby quality.

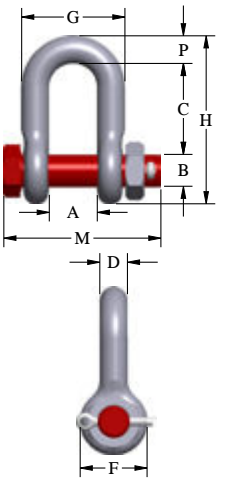

G-2150 Bolt Type Chain Shackles

Nominal Size (in)	Working Load Limit (t)*	Stock No.	Weight Each (kg)	Dimensions (mm)												Replacement Bolt Stock No.
				A	Tol. A ±	B	C	Tol. C ±	D	F	G	H	M	P		
1/4	1/2	1019768	.06	12	1.5	8	22	1.5	6	16	25	40	40	6		-
5/16	3/4	1019770	.10	14	1.5	10	26	1.5	8	19	29	49	46	8		-
3/8	1	1019772	.15	17	1.5	11	32	3.3	10	23	36	59	55	10		-
7/16	1 1/2	1019774	.22	19	1.5	13	37	3.3	11	27	41	68	64	11		-
1/2	2	1019775	.34	21	1.5	16	41	3.3	13	30	46	77	71	13		-
5/8	3 1/4	1019793	.67	27	1.5	20	51	3.3	16	38	59	96	90	16		-
3/4	4 3/4	1019819	1.14	32	1.5	23	61	6.4	19	46	70	115	105	21		-
7/8	6 1/2	1019837	1.75	37	1.5	26	71	6.4	22	53	81	135	122	25		-
1	8 1/2	1019855	2.52	43	1.5	29	81	6.4	25	61	94	151	137	25		-
1-1/8	9 1/2	1019873	3.45	46	1.5	32	90	6.4	29	68	103	172	150	32		1082839
1-1/4	12	1019891	4.90	52	1.5	36	100	6.4	32	76	115	191	170	35		1082857
1-3/8	13 1/2	1019917	6.24	57	3.3	39	111	6.4	35	84	127	210	183	38		1082875
1-1/2	17	1019935	7.72	61	3.3	42	122	6.4	38	92	137	230	196	41		1082893
1-3/4	25	1019953	14.2	73	3.3	52	146	6.4	45	106	162	279	245	54		1082919
2	35	1019971	21.2	83	3.3	59	171	6.4	53	127	184	324	274	60		1082937
2-1/2	55	1019999	38.6	105	6.4	71	203	6.4	67	144	238	377	344	67		1082955
3	† 85	1020013	56.4	127	6.4	84	216	6.4	76	165	279	428	384	89		1084449

6:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit. For Working Load Limit reduction due to side loading applications, see Warnings & Applications. † Individually Proof Tested with certification.

Load Rated Fatigue Rated TA TYPE APPROVED QUIC-CHECK® Q&T QUENCHED & TEMPERED MAXTOUGH® CE

APPLICATION AND WARNING INFORMATION SECTION 17

© 2026-2027 CMCO. All Rights Reserved.