

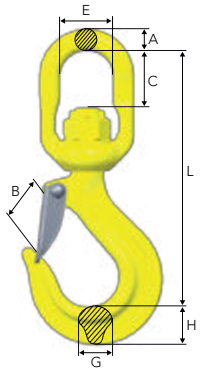

## Foundry Hook OKE

| Stock No. | Code | WLL (t) | Dimensions (mm) | | | | | | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|
| | | | L | B | E | F | G | H | |
| Z100853 | OKE-7/8-10 | 2.6 | 124 | 63 | 28 | 12 | 21 | 26 | 0.8 |
| Z100854 | OKE-10-10 | 4.0 | 151 | 76 | 34 | 15 | 26 | 30 | 1.4 |
| Z100855 | OKE-13-10 | 6.8 | 184 | 90 | 44 | 19 | 33 | 39 | 2.8 |
| Z100898 | OKE-16-10 | 10.3 | 218 | 102 | 56 | 23 | 40 | 46 | 4.9 |
| Z101340 | OKE-20-10 | 16.0 | 247 | 114 | 60 | 27 | 46 | 60 | 7.2 |
| Z101341 | OKE-22-10 | 20.0 | 275 | 120 | 64 | 31 | 60 | 70 | 11.3 |
| Z101342 | OKE-26-10 | 27.3 | 300 | 113 | 70 | 35 | 64 | 77 | 16.0 |

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

For larger sizes, see Classic Grade 8.

4:1 Design Factor



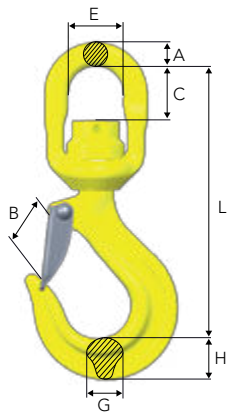

## Swivel Latch Hook LKN

Sling hook with swivel for improved positioning of the hook before the load is lifted (360º rotation).

| Stock No. | Code | WLL (t) | Dimensions (mm) | | | | | | | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | L | B | C | E | A | G | H | |
| Z101345 | LKN-7/8-10 | 2.6 | 155 | 28 | 28 | 38 | 12 | 18 | 24 | 0.8 |
| Z101346 | LKN-10-10 | 4.0 | 192 | 35 | 37 | 44 | 15 | 23 | 31 | 1.5 |
| Z101347 | LKN-13-10 | 6.8 | 238 | 40 | 47 | 48 | 19 | 28 | 38 | 3.1 |
| Z101348 | LKN-16-10 | 10.3 | 295 | 53 | 65 | 61 | 25 | 34 | 43 | 5.3 |

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor



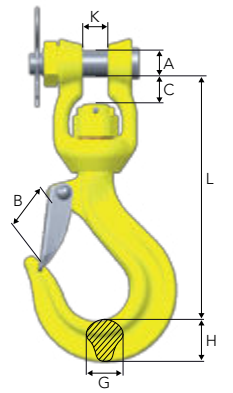

## Swivel Latch Hook LKNK

Swivel latch hook with ball bearing for 360º rotation under full WLL.

| Stock No. | Code | WLL (t) | Dimensions (mm) | | | | | | | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | L | B | C | E | A | G | H | |
| Z101349 | LKNK-7/8-10 | 2.6 | 154 | 28 | 28 | 38 | 12 | 18 | 24 | 0.9 |
| Z101350 | LKNK-10-10 | 4.0 | 191 | 35 | 35 | 44 | 15 | 23 | 31 | 1.6 |
| Z101351 | LKNK-13-10 | 6.8 | 236 | 40 | 45 | 48 | 19 | 28 | 38 | 3.3 |
| Z101352 | LKNK-16-10 | 10.3 | 293 | 53 | 62 | 61 | 25 | 34 | 43 | 5.6 |
| Z101354 | LKNK-22-10 | 20.0 | 400 | 74 | 80 | 80 | 35 | 43 | 67 | 15.1 |

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor




## Clevis Swivel Hook LKNG

For direct connection to small cranes or similar applications that require positioning of hook.

Swivel for improved positioning (360°).

| Stock No. | Code | WLL (t) | Dimensions (mm) | | | | | | | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | L | B | C | A | G | H | K | |
| Z101353 | LKNG-16-10 | 10.3 | 258 | 53 | 30 | 28 | 34 | 43 | 27 | 5.7 |

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor



© 2025 Kito Crosby. All Rights Reserved.