
Midgrab Chain Shortener, MIG

- Instant mounting and positioning on any part of the chain.
- Shortening in either chain direction; up-down.
- Designed to prevent inadvertent chain disengagement.
- Can be set idle on the chain leg when shortening is not required.
- LC version offers secure mounting with locking set on any desired part of the chain with one chain direction open for shortening.
- CC version offers close-open function in both chain directions for safe retention of the chain.

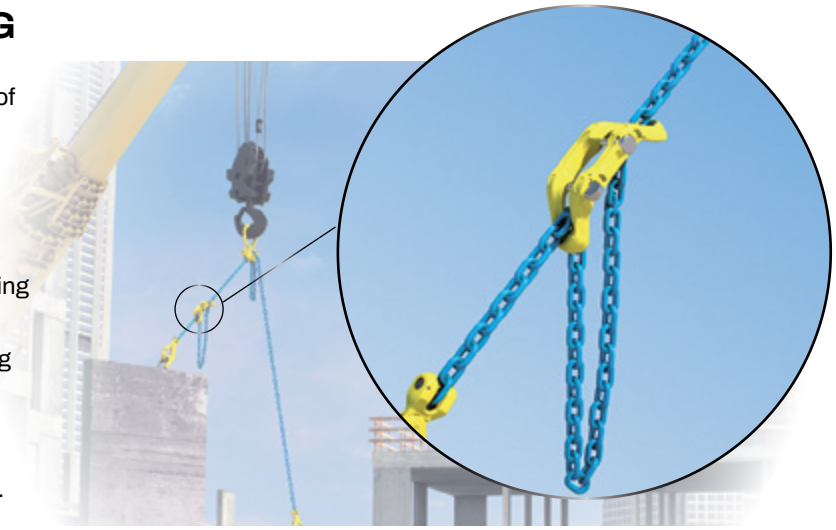

Locking devices for Midgrab MIG

Note: The MIG should be used with at least one locking devices.

L - fixed locking set

For fixed mounting

Code:
L-8: B14905
L-10: B14915
L-13: B14917



C - close/open locking set

Spring operated locking device. Can be placed either in open or closed position.

Code:
C-8: B14904
C-10: B14914
C-13: B14916





Product code guide – locking options




MIG with C pins

For use with Grade 100 or Grade 80 chain.

Stock No.	Code	WLL (t)	Dimensions (mm)			Weight (kg)
			L	X	Y	
B14303	MIG CC-8-10	2.6	95	50	60	0.7
B14313	MIG CC-10-10	4.0	125	70	77	1.1
B14323	MIG CC-13-10	6.8	150	90	80	2.6

4:1 Design Factor

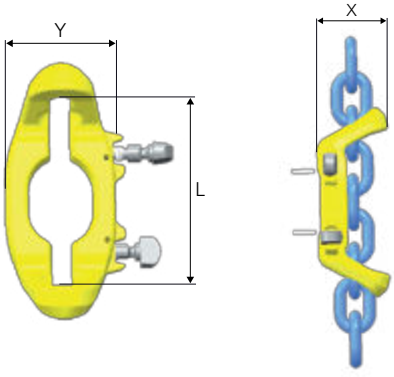

MIG without pins

For use with Grade 100 or Grade 80 chain.

Stock No.	Code	WLL (t)	Dimensions (mm)			Weight (kg)
			L	X	Y	
B14300	MIG-8-10	2.6	95	50	60	0.6
B14310	MIG-10-10	4.0	125	70	77	1.0
B14320	MIG-13-10	6.8	150	90	80	2.5

4:1 Design Factor

© 2025 Kito Crosby. All Rights Reserved.