


## Mid-Link Chain MLFZ, Grade 7


Heat treatment:
Quenched & Tempered

Surface treatment:
Hot-dip galvanized

Not for lifting purposes

| Stock No. | Code | Link Dimensions (mm) | | | Min. Breaking Load (ton) | Weight kg / m | Delivery Length |
|---|---|---|---|---|---|---|---|
| | | d nom. | P | w1 | | | |
| Z802455 | MLFZ 10-6* | 10 | 40 | 14.4 | 10 | 2.0 | 1 x 100 m |
| Z802335 | MLFZ-13-7 | 13 | 55 | 20.2 | 18 | 3.3 | 1 x 100 m |
| Z801645 | MLFZ-16-7 | 16 | 65 | 20.5 | 26.2 | 5.0 | 1 x 100 m |
| Z801477 | MLFZ-19-7 | 19 | 75 | 29 | 37 | 7.1 | 1 x 100 m |

Fulfills requirements in: EN 1461:2009 (Average surface thickness 85µm)
* Average surface thickness 70µm.

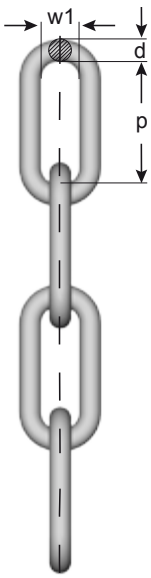


## Long Link Chain LLZ, Grade 6

Heat treatment:
Quenched & Tempered

Surface treatment:
Hot-dip galvanized

Not for lifting purposes

| Stock No. | Code | Link Dimensions (mm) | | | Min. Breaking Load (ton) | Weight kg / m | Delivery Length |
|---|---|---|---|---|---|---|---|
| | | d nom. | P | w1 min | | | |
| Z802453 | LLZ-9-6* | 9 | 53 | 14.3 | 7.8 | 1.4 | 1 x 100 m |
| Z802454 | LLZ-11-6* | 11 | 64 | 18.5 | 11.6 | 2.1 | 4 x 100 m |
| Z800682 | LLZ-13-6 | 13 | 80 | 21.1 | 16.3 | 2.9 | 3 x 100 m |
| Z802207 | LLZ-13-6 | 13 | 80 | 21.1 | 16.3 | 2.9 | 1 x 229,5 m |
| Z801567 | LLZ-16-6 | 16 | 100 | 27 | 24.7 | 4.6 | 1 x 100 m |
| GS1073 | LLZ-16-6 | 16 | 100 | 27 | 24.7 | 4.6 | 1 x 200 m |
| Z801458 | LLZ-19-6 | 19 | 100 | 28.5 | 34.8 | 6.5 | 1 x 120 m |
| Z801887 | LLZ-22-6 | 22 | 120 | 36 | 46.6 | 8.7 | 1 x 50 m |
| Z802447 | LLZ-25-6 | 25 | 140 | 37 | 60.0 | 12.0 | 1 x 50 m |
| Z802449 | LLZ-28-6 | 28 | 150 | 39 | 75.3 | 14.9 | 1 x 50 m |
| Z802451 | LLZ-32-6 | 32 | 170 | 44 | 98.3 | 19.0 | 1 x 50 m |

Fulfills requirements in: EN 1461:2009 (Average surface thickness 85µm)
* Average surface thickness 70µm.



© 2025 Kito Crosby. All Rights Reserved.