IPBC



For Horizontal Transfer - with Pretension System.

IPHGUZ





- Available in capacities of 1 through 4.5 metric tons (Higher Working Load Limits are available upon request).
- Jaw openings available: 0 to 40mm.
- Welded alloy steel body for strength and smaller size. Forged alloy, components where required.
- Equipped with handle for easy placement.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance and repair kits are available.
- Manufactured by an ISO 9001 facility.
- Temperature range -40 °C (-40 °F) to +100 °C (+212 °F)


Model IPBC

Model	Working Load Limit (t)*	Stock No.	Weight Each (kg)	Dimensions (mm)										Maintenance Kit Stock No.
				Jaw A	B	C	E	F	G	H	J	K	L	
IPBC	1	2700410	3.5	0 - 20	132	52	26	75	185	36	16	182	12	2715189
IPBC	2	2700411	6.5	0 - 25	152	62	30	82	210	49	20	218	15	2715198
IPBC	3	2700412	8.5	0 - 25	157	66	30	82	210	57	20	225	15	2715198

*Design Factor based on EN 13155 and ASME B30.20.

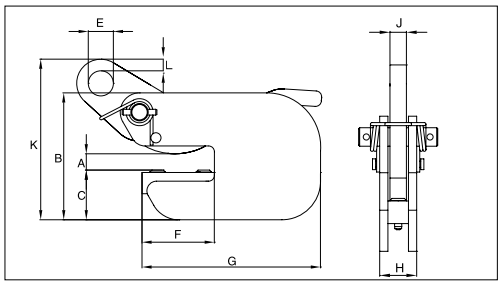

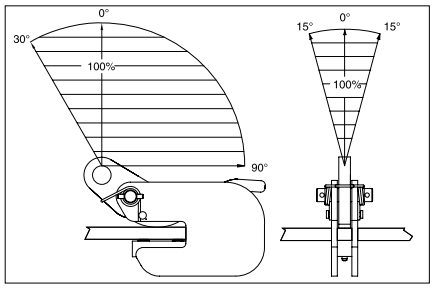





12

IPHGUZ: Universal Lifting Eye / IPHGZ: Fixed Hoisting Eye

Model	Working Load Limit (t)*	Stock No.	Weight Each (kg)	Dimensions (mm)									Maintenance Kit Stock No.
				Jaw A	B	C	D	E	F	G	J	K	
IPHGUZ	1.5	2705455	9.0	0 - 25	110	232	287	70	139	90	20	16	2715450
IPHGUZ	3	2705456	19.9	0 - 40	119	253	348	75	175	120	25	20	2715452
IPHGUZ	4.5	2705457	30.0	0 - 40	119	301	370	80	175	155	30	44	2715454
Fixed Hoisting Eye													
IPHGZ	0.75	2705451	4.0	0 - 25	82	148	206	50	99	98	12	22	-
IPHGZ	1.5	2705452	7.3	0 - 25	110	200	250	50	118	90	20	28	-
IPHGZ	3	2705453	12.3	0 - 40	120	227	305	70	148	120	25	32	-
IPHGZ	4.5	2705454	25.0	0 - 40	120	284	381	70	181	155	30	40	-

* Design Factor based on EN 13155 and ASME B30.20.

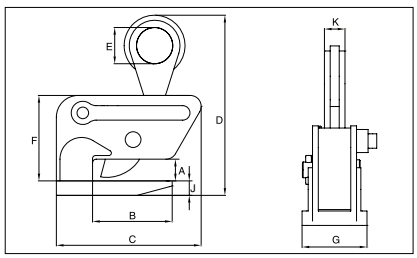

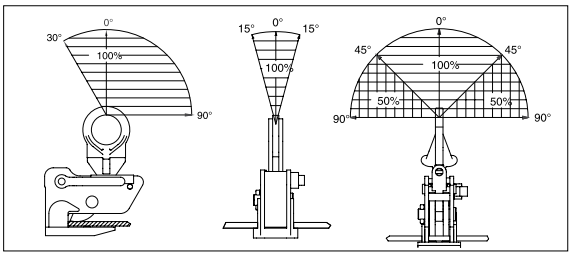



© 2025 Kito Crosby. All Rights Reserved.