
## IPSC10



### Suitable for use in positioning & turning steel plates and sections. Not to be used as a lifting clamp.

- Available in capacities of 1.5 and 3 metric tons.
- Jaw openings available: 0 to 60mm.
- Suitable for steel with a surface hardness up to 300 HV10.
- Forged alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance and repair kits are available.
- Temperature range -40 °C (-40 °F) to +100 °C (+212 °F)


CE Load Tested

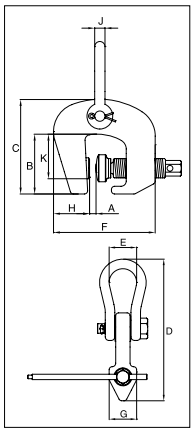


### Model IPSC10

| Model | Working Load Limit (t)* | Stock No. | Weight Each (kg) | Dimensions (mm) | | | | | | | | | | Maintenance Kit Stock No. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Jaw A | B | C | D | E | F | G | H | J | K | |
| IPSC10 | 1.5 | 2703857 | 4.6 | 0 - 40 | 91 | 143 | 251 | 44 | 156 | 50 | 45 | 16 | 65 | 2715492 |
| IPSC10 | 3 | 2703858 | 8.4 | 0 - 60 | 109 | 175 | 310 | 51 | 200 | 62 | 55 | 19 | 83 | 2715493 |

*Design Factor based on EN 13155 and ASME B30.20.

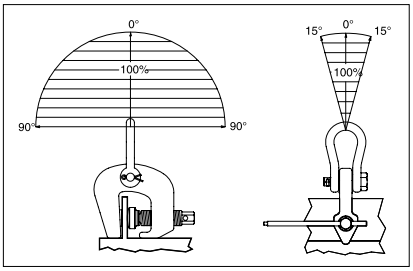





## IPBG



### The Crosby IP Barrier Grab provides a fast and efficient method for handling road barriers.

- Hands-free operation.
- Welded alloy steel construction for strength and smaller size.
- Comes equipped with polyurethane pads. (Replacement kits are available.)
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Temperature range -20 °C (-4 °F) to +70 °C (+158 °F)

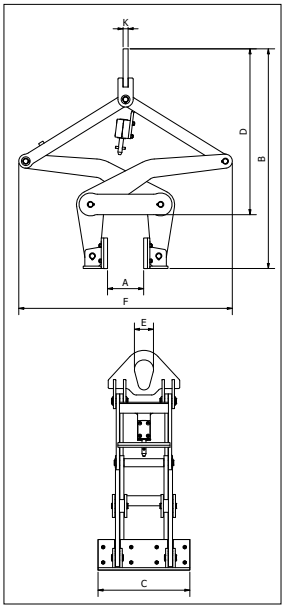


CE Load Tested

### Model IPBG

| Model | WLL (t)* | Stock No. | Weight Each (kg) | Dimensions (mm) | | | | | | | Maintenance Kit Stock No. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Jaw A | B | C | D | E | F | K | |
| IPBG | 4 | 2704018 | 156 | 152 - 305 | 1149 - 861 | 457 | 882 - 598 | 95 | 1038 - 1128 | 25 | 2729615 |

*Design factor based on EN13155 and ASME B30.20.


© 2025 Kito Crosby. All Rights Reserved.