
IPSBUUZ



For Lifting, Transferring and Placing Complete Shipsections.

- Available in capacities of 4.5 through 9 metric tons (higher Working Load Limits are available upon request).
- Wide variety of jaw openings available: HP 100mm to HP 430mm.
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Minimum WLL of 10% of maximum WLL.
- Maintenance and repair kits are available.
- Temperature range -40 °C (-40 °F) to +100 °C (+212 °F)

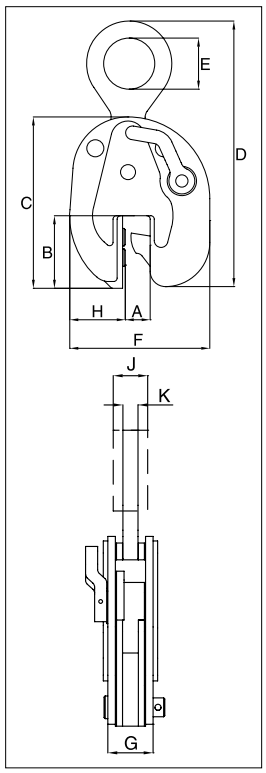


Model IPSBUUZ / IPSBUSUZ: With Universal Hoisting Eye

Model	Working Load Limit (t)*	Stock No.	Weight Each (kg)	Dimensions (mm)										Mainte-nance Kit Stock No.
				Profile A†	B	C	D	E	F	G	H	J	K	
IPSBUUZ	4.5	2705771	15.5	HP 100-160	107	252	450	75	206	96	82	36	20	2715484
IPSBUUZ	9	2705773	43.0	HP 100-160	105	274	491	80	248	123	104	44	20	2715485
IPSBUSUZ	4.5	2705772	38.0	HP 180-430	227	428	635	75	377	95	128	-	20	2715486
IPSBUSUZ	9	2705774	69.0	HP 180-430	227	478	718	80	425	118	155	44	25	2715487

*Design Factor based on EN 13155 and ASME B30.20. **† Profile A is the type of Holland Bulb (HP) style and size material.**

12

IPSBUUZ

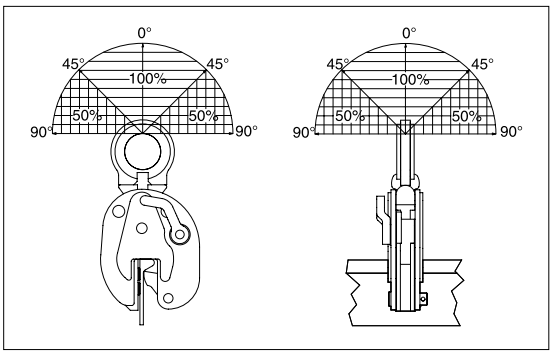



© 2025 Kito Crosby. All Rights Reserved.