HR/UR/TW SERIES
HOSE REEL / UMBILICAL / TRANSPONDER WINCHES

The HR/UR/TW winches are mainly built to order and can be executed with a self braking wormgear or planetary gearbox.


RED ROOSTER LIFTING

RAISING EXPECTATIONS


HOSE REEL



TRANSPONDER WINCH

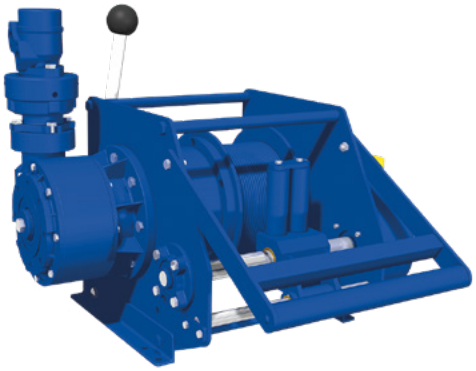

UMBILICAL

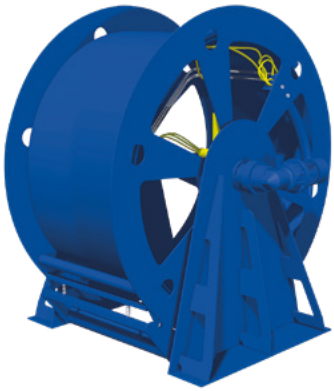

STANDARD FEATURES

- Self-braking wormgear, helical bevel, planetary or slew gear transmissions
- IP 56 TENV 400 V AC / 3 phases / 50 Hz braked motors (or 440/3/60)
- Radial piston air or hydraulic motors
- Heavy duty construction
- Double layer 2-component conservation according
- ISO 12944 category C2-Low, colour RAL 5010

AVAILABLE OPTIONS

- Explosion-proof electric motors
- Protective steel motor covers
- Alternative speeds
- Protective guards
- Stainless steel slip rings (fibre optic or elec.)
- Stainless steel swivels
- Spooling devices

AVAILABLE CONTROL OPTIONS

- Control box IP 55 with push-buttons and emergency stop built acc. to NEN 1010
- Control box IP 66 with low-voltage IP 65 remote
- control built acc. to NEN 1010
- Load limiters
- Frequency inverters for variable speed control
- Wireless radio remote control systems
- Limit switches
- Pneumatic and hydraulic control systems

EMCÉ WINCHES