
Spec Sheet

Cobra Plus Grade 10 Component Connector

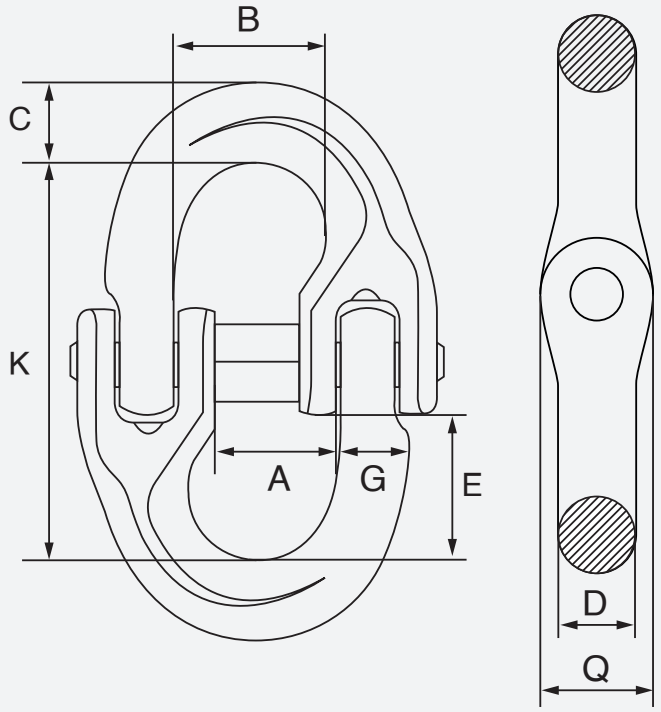

Material	Grade 10 alloy steel, quenched and tempered
Finish	Blue painted
Standard	Meets W.L.L. perf. req. of BS EN 1677-1 +25% of loads
Temp. Range	-20°C up to +200°C
Safety Factor	MBL equals 4 x W.L.L.
Markings	COBRA+, material grade, size, product ID mark and traceability code
Certification	2.1 DoC

Product Code	Chain Dia mm	A mm	B mm	C mm	D mm	K mm	E mm	G mm	Q mm
G100CC6	6	14	16.9	8.5	7	44.5	16	7.4	12
G100CC8	8	18.5	22.7	10.5	10	63	24	10.2	14
G100CC10	10	23	27.7	12.6	12.6	71	28	12.6	18
G100CC13	13	28	33.2	16.5	16.5	92.5	34	17	23
G100CC16	16	33.5	39	20	20	106.5	39	20	29.5
G100CC20	20	42	47.3	25	25	123	42	25.5	35.5
G100CC22	22	48	55	27	27	137.5	50	27	39
G100CC26	26	61	68	32	32	163	63	32	45
G100CC32	32	80	87	40	40	197	78	38.5	54

Chain Dia mm	W.L.L. t	M.P.L. t	M.B.L. t	Weight kgs
6	1.4	3.5	5.6	0.08
8	2.5	6.25	10	0.17
10	4	10	16	0.34
13	6.7	16.75	26.8	0.68
16	10	25	40	1.22
20	16	40	64	2.13
22	19	47.5	76	3
26	26.5	66.25	106	5.22
32	40	100	160	9.55

COBRA GRADE 10

1001 Series



Cobra Plus Grade 10 Component Connector

The Cobra Plus component connector is a grade 10 connecting link, meeting the performance requirements of BS EN 1677-1 +25% of loadings.

These connectors provide fast and easy assembly by using just a hammer.

Designed to connect eye, swivel hooks and master links to grade 10 chains.