
Spec Sheet

Cobra Plus Grade 10 Eye Sling Hook c/w Safety Catch

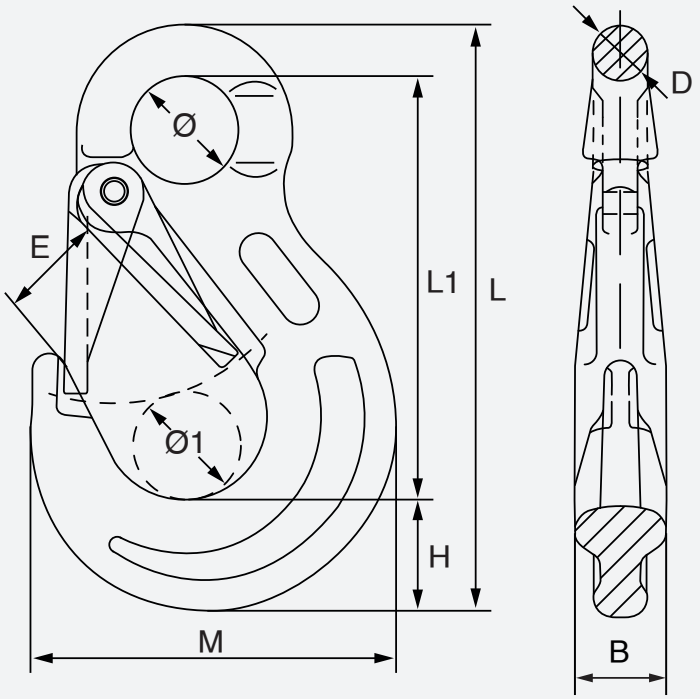

Material	Grade 10 alloy steel, quenched and tempered
Finish	Blue painted
Standard	Meets W.L.L. perf. req. of BS EN 1677-2 +25% of loads
Temp. Range	-20°C up to +200°C
Safety Factor	MBL equals 4 x W.L.L.
Markings	COBRA+, material grade, size, product ID mark and traceability code
Certification	2.1 DoC

Product Code	Chain Dia mm	B mm	D mm	E mm	H mm	Ø mm	Ø1 mm	M mm	L mm	L1 mm
G100ESH6	6	16.5	10	18.5	21	20.5	20	68	111	80
G100ESH8	8	17	11	25.5	27	25	26.4	87	137	99
G100ESH10	10	24	16	29.5	33	35	30	105	170	120
G100ESH13	13	33	19	38	43.5	43	40	133	219	154
G100ESH16	16	40	24.5	44	50	51	50	158	260	185.5
G100ESH20	20	48	27	50	56	55	63	190	298	215
G100ESH22	22	50	29	64	62	60	70	214	330	239
G100ESH26	26	60	35	70	75	70	77	245	376	265
G100ESH32	32	71	39	82	89	81.5	77	270	458	331

Chain Dia mm	W.L.L. t	M.P.L. t	M.B.L. t	Weight kgs
6	1.4	3.5	5.6	0.32
8	2.5	6.25	10	0.6
10	4	10	16	1.2
13	6.7	16.75	26.8	2.2
16	10	25	40	3.5
20	16	40	64	6.2
22	19	47.5	76	11.5
26	26.5	66.25	106	12.2
32	40	100	160	17.5

COBRA GRADE 10

1003 Series



Cobra Plus Grade 10 Eye Sling Hook

The Cobra Plus eye sling hook is a grade 10 eye type sling hook meeting the performance requirements of BS EN 1677-2 +25% of loadings.

Sling Hooks can be used for general lifting applications. It can be quickly connected to the load thanks to its easy operating catch.

The catch is fitted with a spring and pin. The eye of the hook can be connected to grade 10 chain with a component connector.