
Spec Sheet

Cobra Plus Grade 10 Clevis Sling Hook c/w Safety Catch

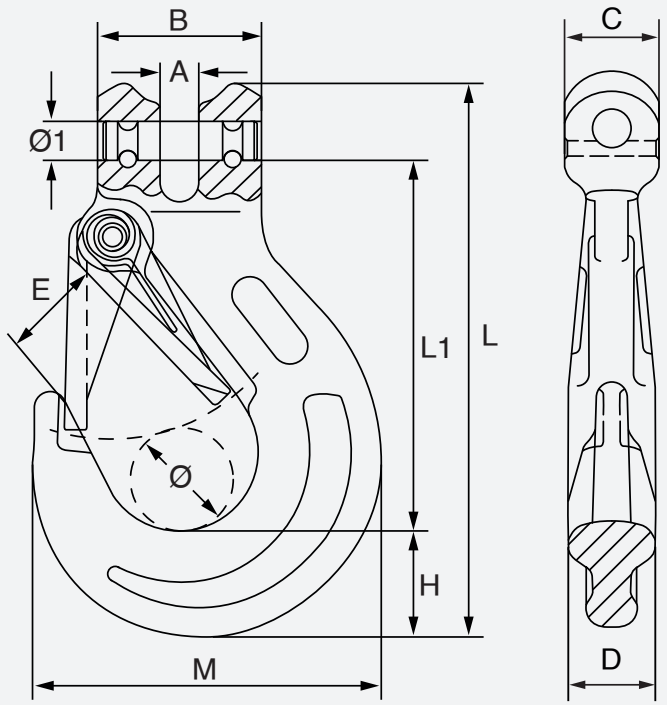

Material	Grade 10 alloy steel, quenched and tempered
Finish	Blue painted
Standard	Meets W.L.L. perf. req. of BS EN 1677-2 +25% of loads
Temp. Range	-20°C up to +200°C
Safety Factor	MBL equals 4 x W.L.L.
Markings	COBRA+, material grade, size, product ID mark and traceability code
Certification	2.1 DoC

Product Code	Chain Dia mm	A mm	B mm	C mm	D mm	E mm	H mm	M mm	L mm	L1 mm	Ø mm
G100CSH6	6	7.5	32	18	16.5	17	21	68.5	109	73	18
G100CSH8	8	9.5	37	23	17	23	27.5	88	134	88.5	24
G100CSH10	10	12.5	48	29.5	24	29	32	102	160	105	30
G100CSH13	13	15	59	37	30	38	42	134	203	132	40
G100CSH16	16	18.5	70	46	38	46	50	156	245	161	50
G100CSH20	20	25	85	52	48	50	56	190.5	297	197	53
G100CSH22	22	27	100	61	50	65	62	214.5	326	214	68
G100CSH26	26	30.5	118	70	60	72	73	248	383	247	76
G100CSH32	32	37.5	149	80	71	87	87	281	474	310	81

Chain Dia mm	W.L.L. t	M.P.L. t	M.B.L. t	Weight kgs
6	1.4	3.5	5.6	0.33
8	2.5	6.25	10	0.6
10	4	10	16	1.3
13	6.7	16.75	26.8	2.3
16	10	25	40	3.6
20	16	40	64	7.3
22	19	47.5	76	12.1
26	26.5	66.25	106	16.1
32	40	100	160	27.2

COBRA GRADE 10

1004 Series



Cobra Plus Grade 10 Clevis Sling Hook

The Cobra Plus clevis sling hook is a grade 10 clevis type sling hook meeting the performance requirements of BS EN 1677-2 +25% of loadings.

Sling Hooks can be used for general lifting applications. It can be quickly connected to the load thanks to its easy operating catch.

The catch is fitted with a spring and pin. Clevis design enables direct connection to grade 10 chain.