
Spec Sheet

Cobra Plus Grade 10 Master Link

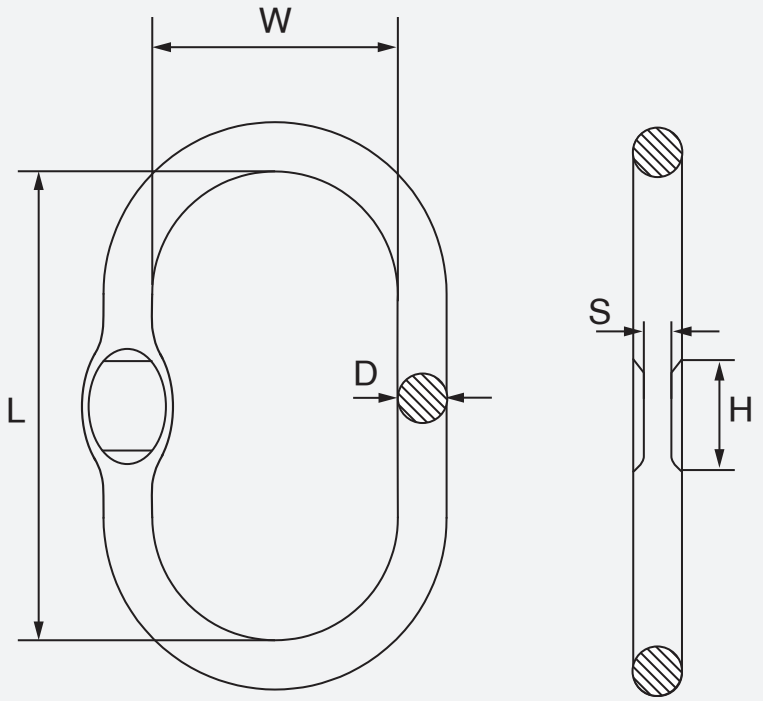

Material	Grade 10 alloy steel, quenched and tempered
Finish	Blue painted
Standard	Meets W.L.L. perf. req. of BS EN 1677-4 +25% of loads
Temp. Range	-20°C up to +200°C
Safety Factor	MBL equals 4 x W.L.L.
Markings	COBRA+, material grade, chain size and traceability code
Certification	2.1 DoC

Product Code	W.L.L. t	M.P.L. t	M.B.L. t	D mm	L mm	W mm	S x H mm	Weight kgs
G100ML76	2.3	4.75	9.2	13	110	60	7x25	0.34
G100ML87	3.5	6.25	14	16	110	60	7x28	0.53
G100ML108	5	10	20	18	135	75	8x30	0.86
G100ML1310	7.6	16.75	30.4	22	160	90	11x43	1.6
G100ML1613	10	25	40	27	180	100	13x43	2.46
G100ML1916	14	35	56	33	200	110	17x55	4.14
G100ML2219	25.1	47.5	100.4	36	260	140	19x60	6.22
G100ML2622	30.8	66.25	123.2	45	340	180	-	12.85
G100ML3222	40	98.25	160	50	350	190	-	16.55
G100ML0032	60	120	240	60	400	200	-	27

COBRA GRADE 10

1011 Series



Cobra Plus Grade 10 Master Link

The Cobra Plus master link is a single grade 10 master link meeting the performance requirements of BS EN 1677-4 +25% of loadings.

The single master link is designed for 1 or 2 leg assemblies. Available in a range with working load limits from 2.3t up to 60t.