

Cobra Grade 8 Webbing Connector EN 1677-1

Grade 8 Webbing Connecting Link



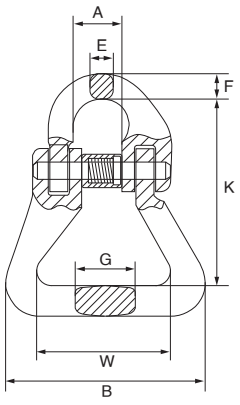

001

Material	Grade 8 alloy steel
Finish	Red painted
Standard	BS EN 1677-1
Safety Factor	MBL equals 4 x W.L.L.
Temp. range	-40°C up to +200°C.
Markings	**COBRA**, material grade, size, product ID mark and traceability code
Certification	2.1 3.1 DoC

Product Code	Chain Dia mm	A mm	B mm	E mm	F mm	G mm	K mm	W mm	W.L.L. t	Weight kgs
CG8WC6	6	15.5	59	7	7.5	18	56	38	1.12	0.2
CG8WC8	7/8	20	61.5	8.5	9	24	64	38	2	0.3
CG8WC10	10	24	75	11	12	30.5	86	45	3.15	0.53
CG8WC13	13	28.5	88	16.5	16.5	36.8	94	51	5.3	1.03
CG8WC16	16	35	108	19.8	20	45.2	122	63	8	1.87
CG8WC20	20	41	129	23	23	51.8	138	77	12.5	2.97
CG8WC22	22	49.5	191	26	26	70	180	123	15	6.4
CG8WC26	26	58	228.4	30	31.4	86	209.5	149	21.2	10.25
CG8WC32	32	72.5	252	37	38	91	279	157	31.5	19