CB005 ATEX
ATEX MANUAL CHAIN HOIST


RED ROOSTER LIFTING

STANDARD FEATURES

- Screw-and-disc type load brake
- Double pawl spring
- Nickel-plated load chain grade V (G100)
- Zone 1 Gas Ex Group II 2 G Ex h IIB T4 Gb
  Zone 21 Dust Ex Group II 2 D Ex h IIIB 135°C Db
- Operating temp -40°c to +30°C
- Made in Japan

AVAILABLE OPTIONS

- Geared trolley
- Plain trolley
- Overload limiter
- Canvas chain bucket

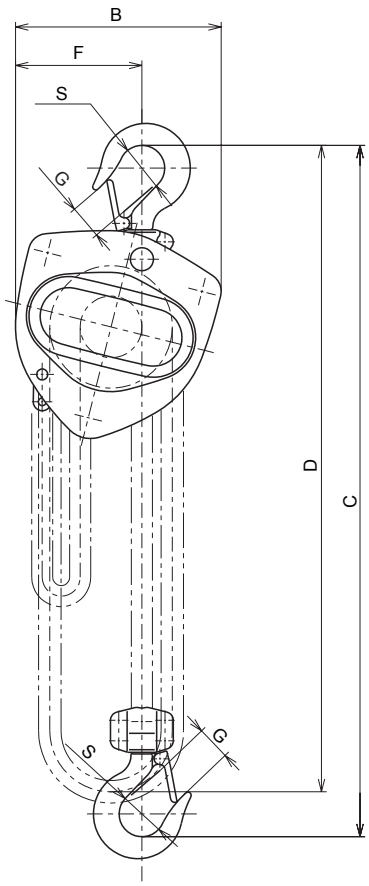

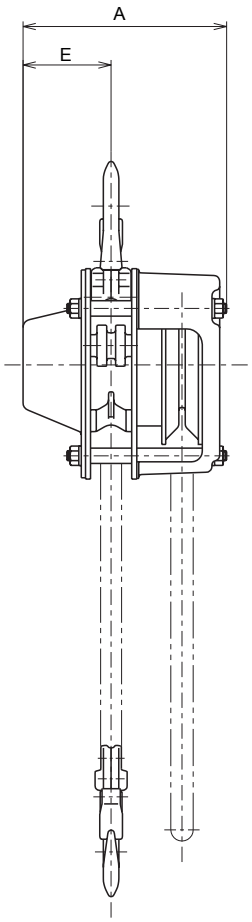




Image for illustration purposes only

MODEL	HEADROOM C	A	B	D	E	F	G	S
CB005 ATEX	295	162	161	2500	71	99	29.0	42.5

All measurements are in mm

MODEL	CB005 ATEX
WLL	500 kg
STANDARD LIFT	2.5 m
HAND PULL TO LIFT FULL LOAD	23.5 daN
LOAD CHAIN DIAMETER x CHAIN FALL	6.3 x 19.1 mm
CHAIN FALL	1
NET WEIGHT	11.5 kg
WEIGHT PER ADDITIONAL METRE LIFT	1.8 kg

Information subject to change without notice

KITO