CB010 ATEX
ATEX MANUAL CHAIN HOIST

RED ROOSTER LIFTING

DESIGNED AND MANUFACTURED ACCORDING TO:


- EC Machinery Directive 2006/42/EC
- ATEX Directive 2014/34/EU
- EN13157


STANDARD FEATURES

- Screw-and-disc type load brake
- Double pawl
- Nickel-plated load chain grade V (G100)
- Group II 2 G Ex h IIB T3
- Group II 2 D Ex h IIIB T200°C
- Operating temp -20°C to +40°C
- Overload limiter
- Stainless steel 316 hand chain

AVAILABLE OPTIONS

- Geared trolley
- Plain trolley
- Canvas chain bucket

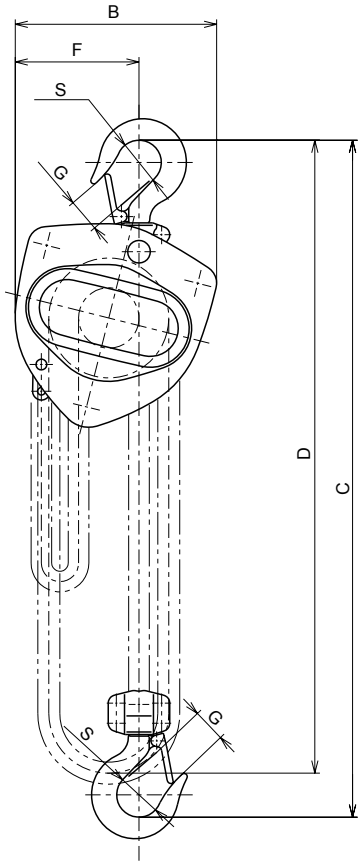

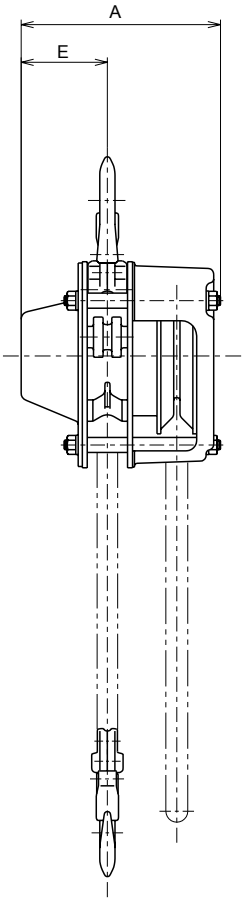

MODEL	HEADROOM C	A	B	D	E	F	G	S
CB010 ATEX	350	171	182	2500	78	112	34.0	47.5

All measurements are in mm

MODEL	CB010 ATEX
WLL	1000 kg
STANDARD LIFT	3.0 m
HAND PULL TO LIFT FULL LOAD	28.4 daN
LOAD CHAIN DIAMETER x CHAIN FALL	7.1 x 21.2 mm
CHAIN FALL	1
NET WEIGHT	14.5 kg
WEIGHT PER ADDITIONAL METRE LIFT	2.1 kg

Information subject to change without notice



Image for illustration purposes only

KITO