CB020 ATEX
ATEX MANUAL CHAIN HOIST


RED ROOSTER LIFTING

STANDARD FEATURES

- Screw-and-disc type load brake
- Double pawl spring
- Nickel-plated load chain grade V (G100)
- Group II 2 GDc IIB T4 135°C
- Operating temp -40°c to +30°C
- Made in Japan

AVAILABLE OPTIONS

- Geared trolley
- Plain trolley
- Overload limiter
- Canvas chain bucket

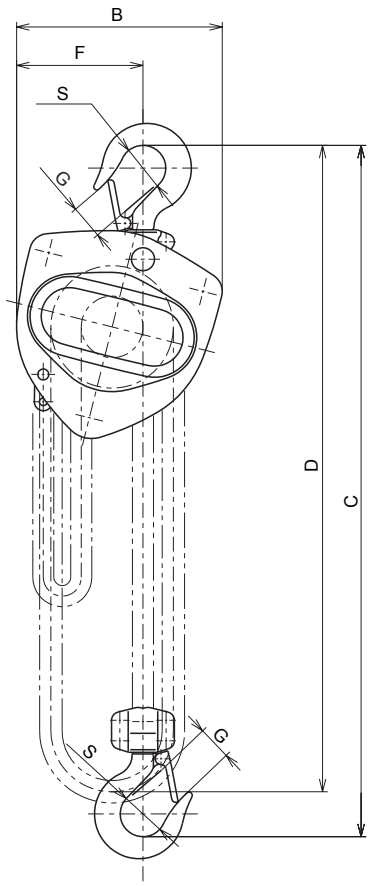

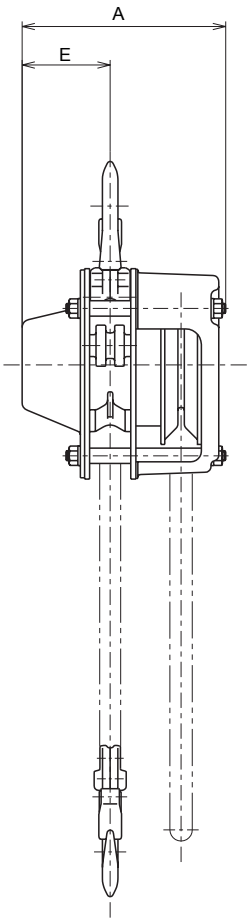




Image for illustration purposes only

MODEL	HEADROOM C	A	B	D	E	F	G	S
CB020 ATEX	510	171	235	3100	78	162	42.5	56.0

All measurements are in mm

MODEL	CB020 ATEX
WLL	2000 kg
STANDARD LIFT	3.0 m
HAND PULL TO LIFT FULL LOAD	35.3 daN
LOAD CHAIN DIAMETER x CHAIN FALL	7.1 x 21.2 mm
CHAIN FALL	2
NET WEIGHT	24.0 kg
WEIGHT PER ADDITIONAL METRE LIFT	3.2 kg

Information subject to change without notice

KITO