CB030 ATEX
ATEX MANUAL CHAIN HOIST

RED ROOSTER LIFTING

DESIGNED AND MANUFACTURED ACCORDING TO:


- EC Machinery Directive 2006/42/EC
- ATEX Directive 2014/34/EU
- EN13157

STANDARD FEATURES

- Screw-and-disc type load brake
- Double pawl spring
- Nickel-plated load chain grade V (G100)
- Group II 2 GD IIB c T3 T200°C
- Operating temp -20°C to +40°C

AVAILABLE OPTIONS

- Geared trolley
- Plain trolley
- Overload limiter
- Canvas chain bucket
- Stainless steel 316 hand chain

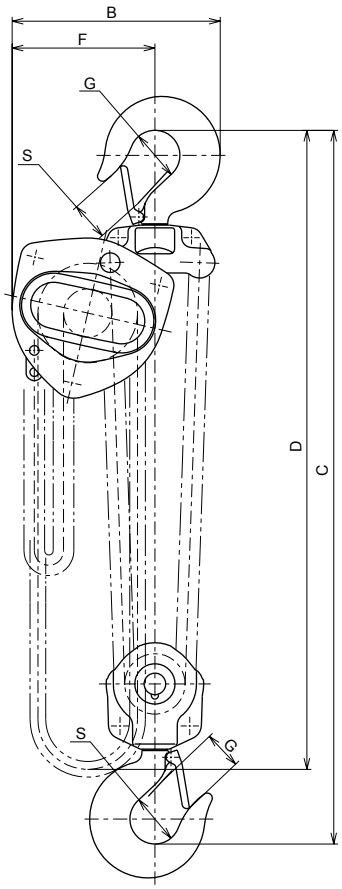

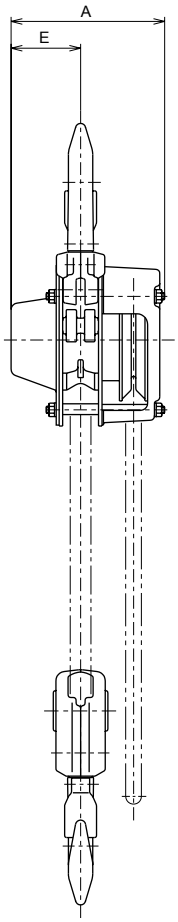




Image for illustration purposes only

MODEL	HEADROOM C	A	B	D	E	F	G	S
CB030 ATEX	600	192	282	3600	91	194	46.5	63.0

All measurements are in mm

MODEL	CB030 ATEX
WLL	3000 kg
STANDARD LIFT	3.0 m
HAND PULL TO LIFT FULL LOAD	35.3 daN
LOAD CHAIN DIAMETER x CHAIN FALL	9.0 x 27.2 mm
CHAIN FALL	2
NET WEIGHT	41.0 kg
WEIGHT PER ADDITIONAL METRE LIFT	4.4 kg

Information subject to change without notice

KITO