CB050 ATEX
ATEX MANUAL CHAIN HOIST


RED ROOSTER LIFTING


STANDARD FEATURES

- Screw-and-disc type load brake
- Double pawl spring
- Nickel-plated load chain grade V (G100)
- Group II 2 GDc IIB T4 135°C
- Operating temp -40°c to +30°C
- Made in Japan

AVAILABLE OPTIONS

- Geared trolley
- Plain trolley
- Overload limiter
- Canvas chain bucket

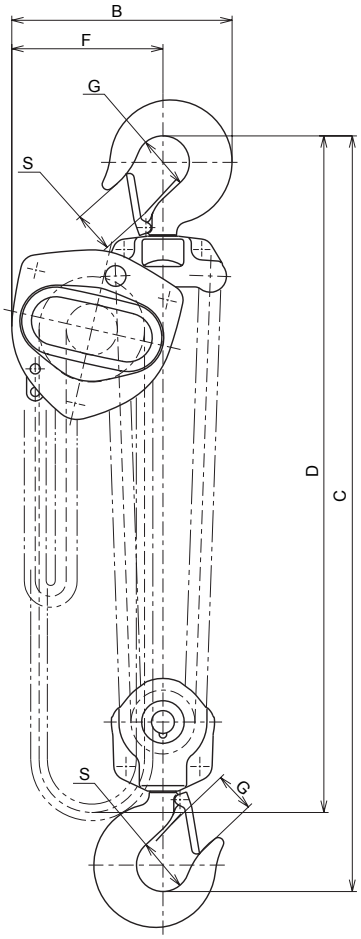

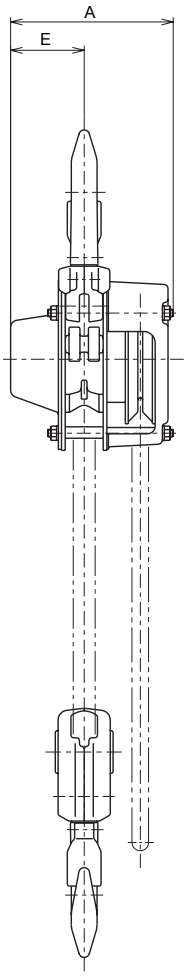

MODEL	HEADROOM C	A	B	D	E	F	G	S
CB050 ATEX	600	192	282	3600	91	194	46.5	63.0

All measurements are in mm

MODEL	CB050 ATEX
WLL	5000 kg
STANDARD LIFT	3.5 m
HAND PULL TO LIFT FULL LOAD	33.3 daN
LOAD CHAIN DIAMETER x CHAIN FALL	9.0 x 27.2 mm
CHAIN FALL	2
NET WEIGHT	41.0 kg
WEIGHT PER ADDITIONAL METRE LIFT	4.4 kg

Information subject to change without notice



Image for illustration purposes only

KITO