CB200 ATEX
ATEX MANUAL CHAIN HOIST


RED ROOSTER LIFTING

STANDARD FEATURES

- Screw-and-disc type load brake
- Double pawl spring
- Nickel-plated load chain grade V (G100)
- Group II 2 GDc IIB T4 135°C
- Operating temp -40°c to +30°C
- Made in Japan

AVAILABLE OPTIONS

- Geared trolley
- Plain trolley
- Overload limiter
- Canvas chain bucket

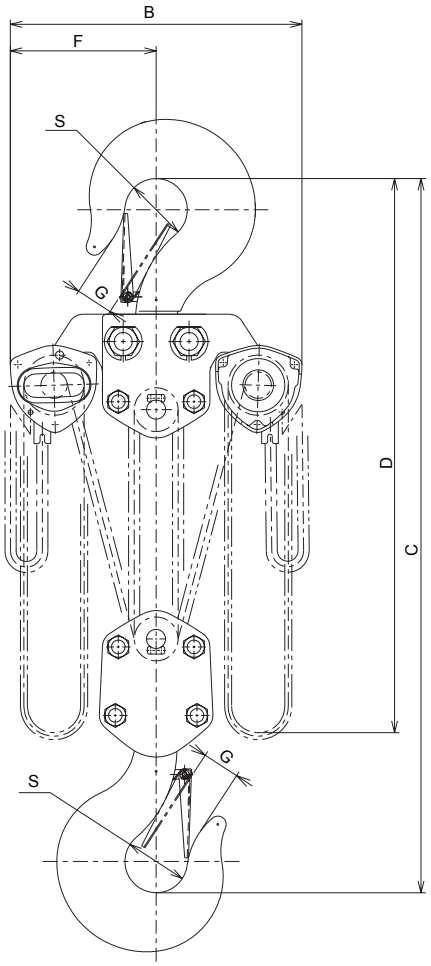

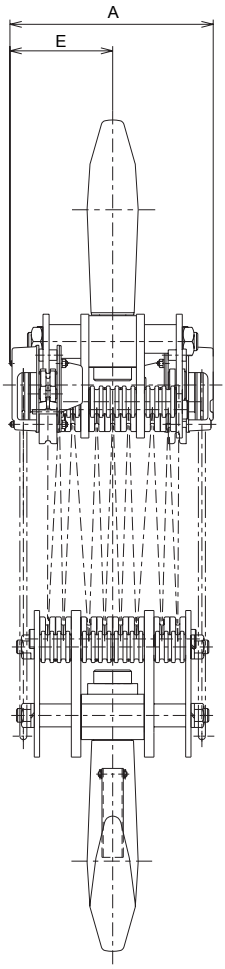




Image for illustration purposes only

MODEL	HEADROOM C	A	B	D	E	F	G	S
CB200 ATEX	1180	374	746	4800	187	373	81	110

All measurements are in mm

MODEL	CB200 ATEX
WLL	20000 kg
STANDARD LIFT	4.5 m
HAND PULL TO LIFT FULL LOAD	35.3 daN x 2
LOAD CHAIN DIAMETER x CHAIN FALL	9.0 x 27.2 mm
CHAIN FALL	8
NET WEIGHT	235.0 kg
WEIGHT PER ADDITIONAL METRE LIFT	15.8 kg

Information subject to change without notice

KITO