CB300 ATEX
ATEX MANUAL CHAIN HOIST


RED ROOSTER LIFTING

STANDARD FEATURES

- Screw-and-disc type load brake
- Double pawl spring
- Nickel-plated load chain grade V (G100)
- Group II 2 GDc IIB T4 135°C
- Operating temp -40°c to +30°C
- Made in Japan

AVAILABLE OPTIONS

- Geared trolley
- Plain trolley
- Overload limiter
- Canvas chain bucket

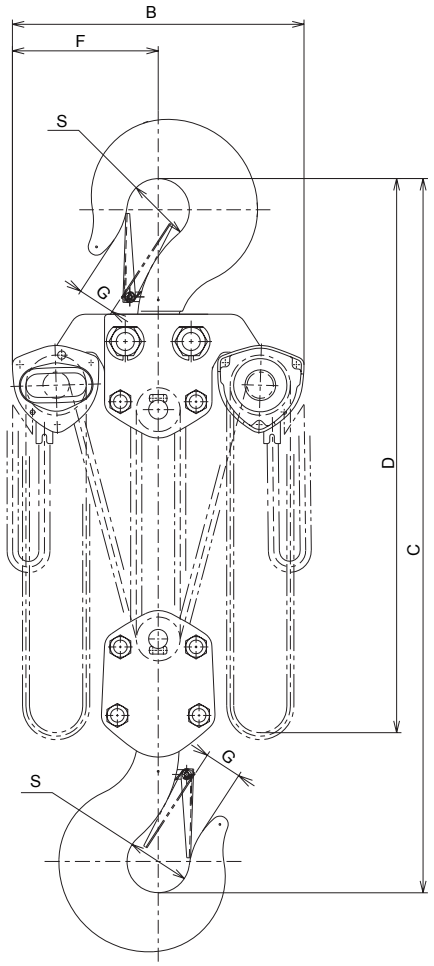

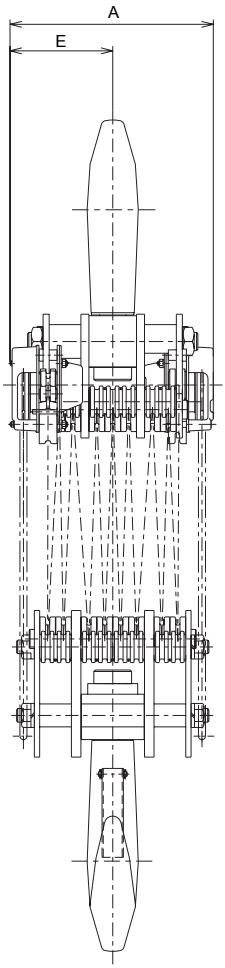




Image for illustration purposes only

MODEL	HEADROOM C	A	B	D	E	F	G	S
CB300 ATEX	1300	404	746	4800	202	373	103	125

All measurements are in mm

MODEL	CB300 ATEX
WLL	30000 kg
STANDARD LIFT	4.5 m
HAND PULL TO LIFT FULL LOAD	42.1 daN x 2
LOAD CHAIN DIAMETER x CHAIN FALL	9.0 x 27.2 mm
CHAIN FALL	10
NET WEIGHT	310.0 kg
WEIGHT PER ADDITIONAL METRE LIFT	19.2 kg

Information subject to change without notice

KITO