# CB400 ATEX
# ATEX MANUAL CHAIN HOIST


RED ROOSTER LIFTING

## STANDARD FEATURES

- Screw-and-disc type load brake
- Double pawl spring
- Nickel-plated load chain grade V (G100)
- Group II 2 GDc IIB T4 135°C
- Operating temp -40°c to +30°C
- Made in Japan

## AVAILABLE OPTIONS

- Geared trolley
- Plain trolley
- Overload limiter
- Canvas chain bucket

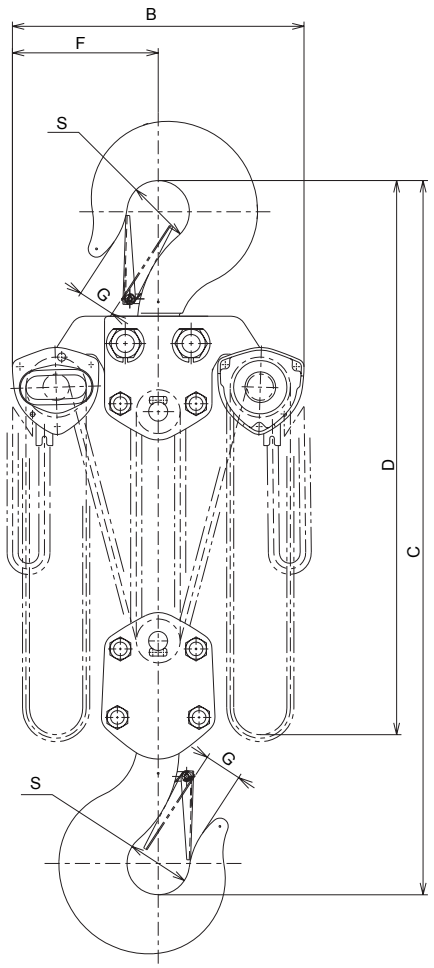

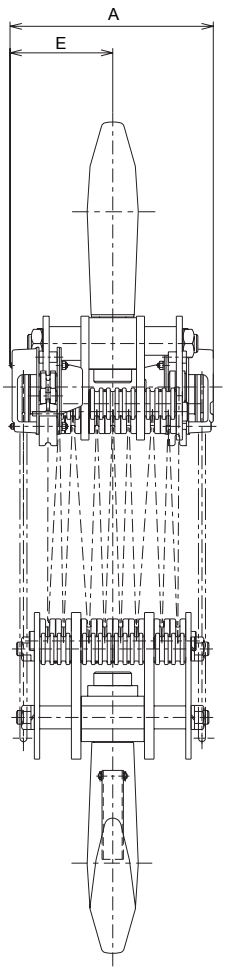







Image for illustration purposes only

| MODEL | HEADROOM C | A | B | D | E | F | G | S |
|---|---|---|---|---|---|---|---|---|
| CB400 ATEX | 1480 | 502 | 760 | 4900 | 251 | 380 | 93 | 145 |

All measurements are in mm

| MODEL | CB400 ATEX |
|---|---|
| WLL | 40000 kg |
| STANDARD LIFT | 4.5 m |
| HAND PULL TO LIFT FULL LOAD | 42.1 daN x 2 |
| LOAD CHAIN DIAMETER x CHAIN FALL | 9.0 x 27.2 mm |
| CHAIN FALL | 14 |
| NET WEIGHT | 480.0 kg |
| WEIGHT PER ADDITIONAL METRE LIFT | 26.2 kg |

Information subject to change without notice

KITO