CB500 ATEX
ATEX MANUAL CHAIN HOIST


RED ROOSTER LIFTING

STANDARD FEATURES

- Screw-and-disc type load brake
- Double pawl spring
- Nickel-plated load chain grade V (G100)
- Group II 2 GDc IIB T4 135°C
- Operating temp -40°c to +30°C
- Made in Japan

AVAILABLE OPTIONS

- Geared trolley
- Plain trolley
- Overload limiter
- Canvas chain bucket

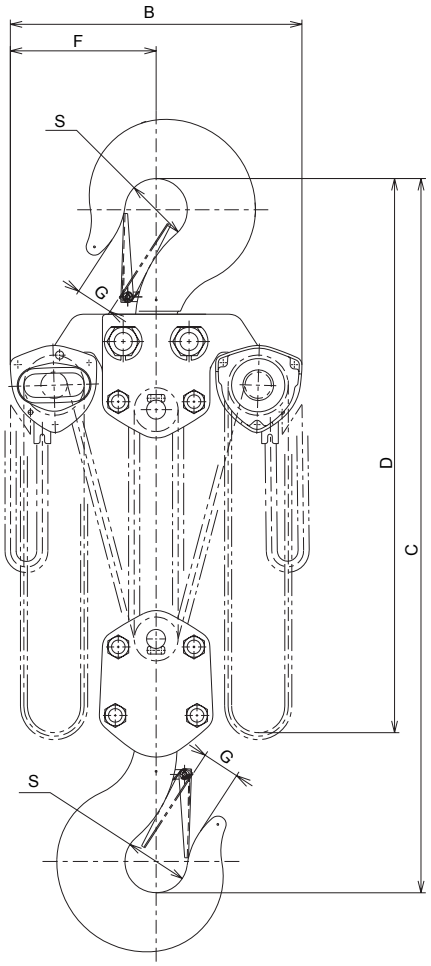

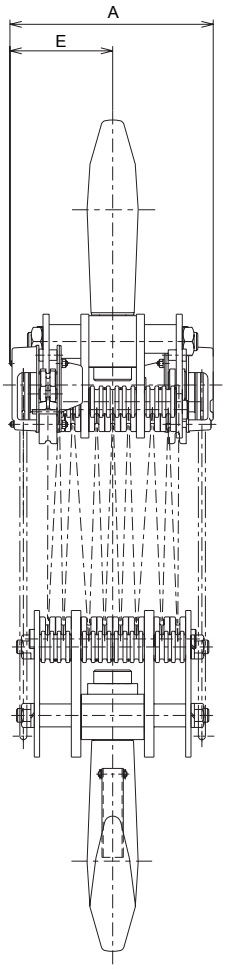




Image for illustration purposes only

MODEL	HEADROOM C	A	B	D	E	F	G	S
CB500 ATEX	1560	544	796	4900	272	398	100	165

All measurements are in mm

MODEL	CB500 ATEX
WLL	50000 kg
STANDARD LIFT	4.5 m
HAND PULL TO LIFT FULL LOAD	48.0 daN x 2
LOAD CHAIN DIAMETER x CHAIN FALL	9.0 x 27.2 mm
CHAIN FALL	16
NET WEIGHT	640.0 kg
WEIGHT PER ADDITIONAL METRE LIFT	29.7 kg

Information subject to change without notice

KITO