EDC18SD - DUAL SPEED ELECTRIC CHAIN HOIST

RED ROOSTER LIFTING


KITO

STANDARD FEATURES

- 230V contactor control
- Protection class IP44
- Upper limit switch
- Variable lifting speed
- High-performance mechanical load brake
- Plastic chain bucket

AVAILABLE OPTIONS

- Geared trolley
- Plain trolley
- Plain mini trolley

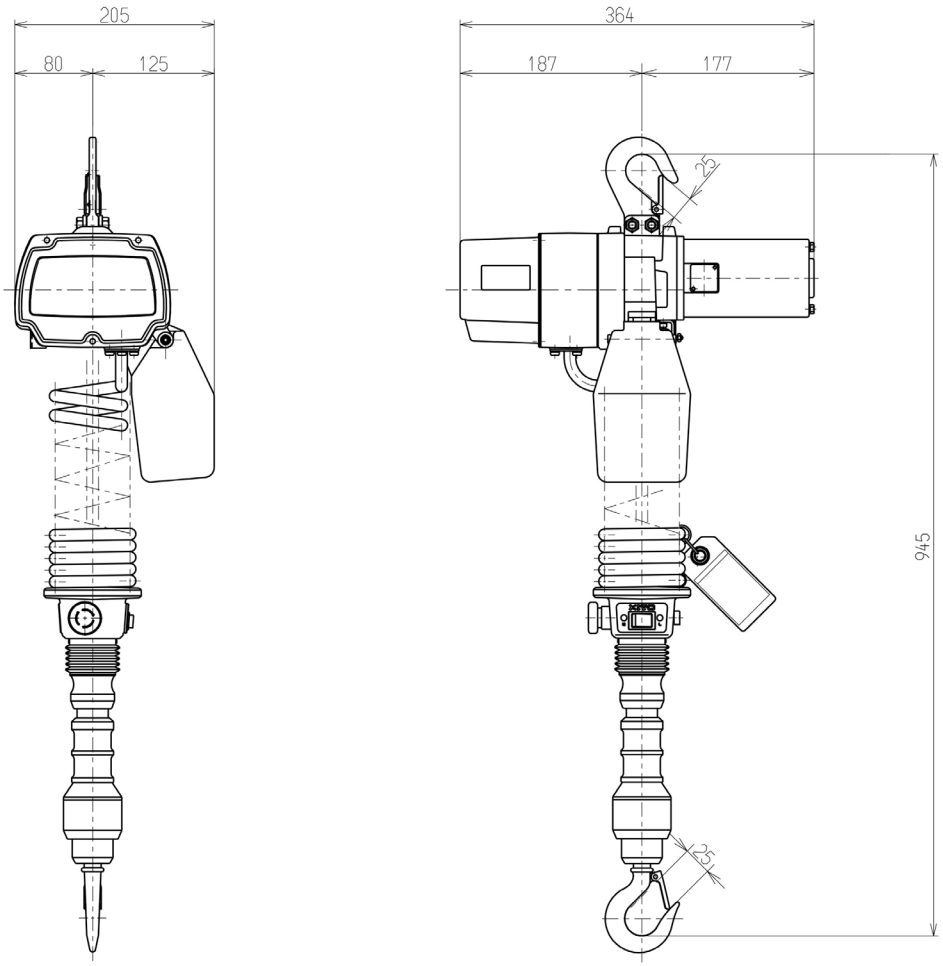



All measurements are in mm

MODEL	WLL (KG)	LIFTING MOTOR		LIFTING SPEED M/MIN 50Hz		LOAD CHAIN		
		OUTPUT (kW)	RATING (%)	HIGH	LOW	DIA (MM)	x	CHAIN FALLS
EDC18SD	180	0.3	20	7.7	3.0	4.0	x	1
	CLASSIFICATION ISO / FEM			NET WEIGHT (KG)		HEIGHT OF LIFT (M)		
	1Am			14.5		1.8		

Information subject to change without notice

Image for illustration purposes only