
MR2 | 125 KG - 5 TONNE
SINGLE SPEED ELECTRIC TROLLEY

The MR2 is an electric trolley available up to 5 tonne.

RED ROOSTER LIFTING

RAISING EXPECTATIONS

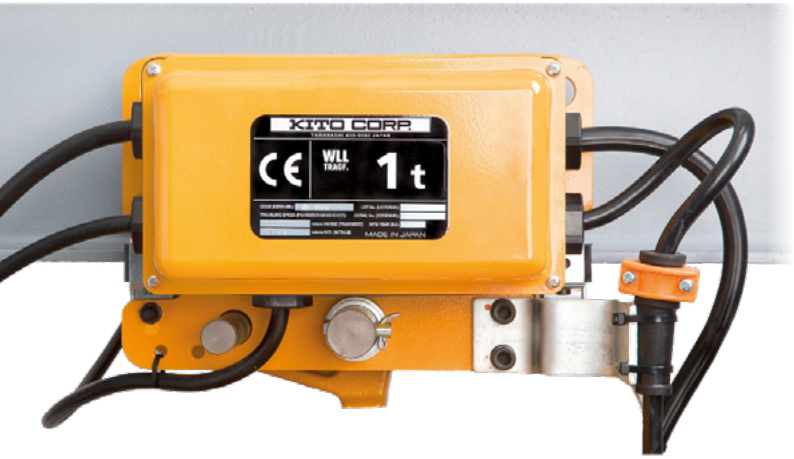

Wherever loads need to be transported safely and precisely, the KITO MR2 motor chassis is the ideal choice. In combination with the ER2 electric chain hoist, the result is a perfect solution for all lifting and travel applications. The KITO MR2 motor trolleys are suitable for all common beam types (flat or conical beam types) up to 300 mm wide.

STANDARD FEATURES

- Up to 5,000 kg load capacity
- 380 - 440 V / 50-60 Hz / 3 Phase
- Robust motor with overheat protection
- Connector for rigid suspension (ER2 electric chain hoist)
- IP55 rating for indoor and outdoor applications
- Suitable for up to 85% humidity
- Heat-treated wheels

AVAILABLE OPTIONS

- Fall protection device and bumpers as a set
- Dual Speed

MODEL	WLL KG	FLANGE WIDTH MM	TRAVEL SPEED M/MIN	ED %	MIN RADIUS MM	NET WEIGHT KG
MR2-001S	125	50-163	20	40	800	33
MR2-003S	250	50-163	20	40	800	33
MR2-005S	500	50-163	20	40	800	33
MR2-010S	1000	50-163	20	40	800	33
MR2-016S	1600	82-204	20	40	800	42
MR2-020S	2000	82-204	20	40	800	42
MR2-025S	2500	82-204	20	40	1000	55
MR2-032S	3200	82-204	20	40	1000	55
MR2-050S	5000	100-204	20	40	1000	82

KITO